

**FACTORY AUTOMATION** 

# **VPR Series Vacuum Circuit Breakers**



Safety & Quality

# 

To ensure proper use of the products listed in this catalog, please be sure to read the instruction manual prior to use.

MITSUBISHI ELECTRIC CORPORATION HEAD OFFICE: TOKYO BUILDING.,2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

JNEC-SL-0162-A (IP) Printed March 2021 All trademarks acknowledged.

Global Player Contents

# GLOBAL IMPACT OF MITSUBISHI ELECTRIC







Through Mitsubishi Electric's vision, "Changes for the Better" are possible for a brighter future.

# Changes for the Better

"Changes for the Better" represents the Mitsubishi Electric Group's attitude to "always strive to achieve something better", as we continue to change and grow. Each one of us shares a strong will and passion to continuously aim for change, reinforcing our commitment to creating "an even better tomorrow".

Mitsubishi Electric is involved in many areas including the following:

# **Energy and Electric Systems**

A wide range of power and electrical products from generators to large-scale displays.

# **Electronic Devices**

A wide portfolio of cutting-edge semiconductor devices for systems and products.

# **Home Appliance**

Dependable consumer products like air conditioners and home entertainment systems.

# **Information and Communication Systems**

Commercial and consumer-centric equipment, products and systems.

## **Industrial Automation Systems**

Maximizing productivity and efficiency with cutting-edge automation technology.

adding new value to society in diverse areas from automation to information systems. The creation of game-changing solutions is helping to transform the world, which is why we are honored to be recognized in the 2019 'Forbes Digital 100' as one of world's most influential digital corporations.

Our advances in AI and IoT are

# **OVERVIEW**

FEATURES	3
CONSTRUCTION	5
TYPE SELECTION	7
RATINGS	9
EXTERNAL DIMENSIONS	11
CONNECTION DIAGRAMS	33
ACCESSORIES	37
OPTIONAL ACCESSORIES	39
RELEVANT DEVICES	49
INTERLOCKING PROCESS FOR THE PANEL DOOR WHEN USING WITHDRAWABLE WITH DOOR CLOSED(TYPE-M) OPERATION MECHANISM	54
TECHNICAL INFORMATION	55
APPLICABLE STANDARD	59
ORDERING INFORMATION	65

1

2

<del>ပ</del>

5

\_

8

9

11

12

10

# VPR series

High Levels of Reliability and Safety
Achieved Through Use of the
Latest Technologies Vacuum Circuit Breakers
Designed for the Future
with Enhanced Environmental Measures and
Maintenance Features.



# 10-VPR-D Series

# **Outstanding Reliability**

- •Incorporates Mitsubishi Electric vacuum interrupter technology, realizing a more compact vacuum interrupter (VI) 16% smaller than in the previous type\* and high reliability (class E2).
- •Self-cooling vacuum circuit breakers (VCBs) that do not require a fan to be mounted on the panel. Available in a wide range, from rated current of 600 to 3,150A.
- Compliant with IEC 62271-100-2012 and has passed type tests for classes M2, E2 and C2, which represent the highest levels of quality.
  \*The VI in 10-VPR-32D (1,250A)

# **High-level Safety**

●Exposure of live parts in the main circuit has been minimized even in VCBs with a 3,150A rating. This enhances safety through prevention of potential hazards such as short circuits caused by intrusion of small animals.

# **Simple Maintenance**

- •The mechanical parts are coated with a long-life grease that contributes to the prevention of oxidation degradation and oilless bearings has been adopted for the bearing section of latch, thus extending the lubrication cycle to mechanical parts from three to six years and reducing the time required for maintenance.
- ●Includes a new withdrawable with door closed<sup>®</sup> (in addition to the conventional lever-based insert/draw-out mechanism) with cam-slide mechanism that reduces operating effort, saves time and enhances VCB safety.
- \*Mechanism used to insert/draw-out the circuit breaker from the external panel based on IEC 62271-200 switchgear standards.
- •Enhanced options including additional auxiliary switch and earthing switch.
- ●VCB with the rated normal current up to 3,150A is transported together with a panel by shipping clamps
- •Compatibility with mounting frame of previous 10-VPR-C Series (positions of mounting holes, terminals and partitions are the same).

# **Pursuit of Environmental Design**

- •No use of the six hazardous substances (mercury, cadmium, lead, hexavalent chromium, PBB and PBDE), a measure that exceeds the requirements of RoHS standards. One example is use of a rust-proofing treatment for small parts such as pins and screws that is free of hexavalent chromium, a substance known to contaminate soil.
- •Marking of main resin materials to facilitate recycling.

# 3/6-VPR-D Series

# **Simple Maintenance**

•The mechanical parts are coated with a long-life grease that contributes to the prevention of oxidation degradation and oilless bearings has been adopted for the bearing section of latch, thus extending the lubrication cycle to mechanical parts from three to six years and reducing the time required for maintenance.

FEATURES

# **Pursuit of Environmental Design**

- •No use of the six hazardous substances (mercury, cadmium, lead, hexavalent chromium, PBB and PBDE), a measure that exceeds the requirements of RoHS standards. One example is use of a rust-proofing treatment for small parts such as pins and screws that is free of hexavalent chromium, a substance known to contaminate soil.
- •Marking of main resin materials to facilitate recycling.

# 10-VPR-50C(D) 4000A

# **Outstanding Reliability**

Enabling a self-cooling mechanism with 4000A rated normal current without cooling fans.

# 20-VPR-D Series

# **Pursuit of Quality to the Limit**

- Vacuum Interrupter
  - Pursuit of high breaking performance and high electric strength performance by applying efficient contact material.
  - Pursuit of the optimum structural design by application of the most advanced arc control technology and insulation design technology.
  - Pursuit of improvement in magnetic drive efficiency by spiral contact.
- Operation mechanism
- The conventional BH-1H type operation mechanism is further advanced, and operation stability is pursued by simple operation principle confirmed by motion analysis technology and stress analysis technology, etc.
- Pursuit of maintenance cost reduction by extending the operation mechanism inspection interval from 3 years of the type VPR-C to 6 years by adopting long life grease.
- Pursuit of convenience by attempting to use the same motor for charging the closing spring for both AC and DC power sources.
- Main circuit
- Pursuit of heat generation reduction of the main circuit by application of electric resistance welding on the shunt part and reducing the contact resistance.
- Pursuit of contact stability by adopting 2-point contact structure by forging the primary junction.

# **Pursuit of Safety and Reliability**

- Pursuit of safety by applying withdrawable with door closed operation mechanism, metal shutter and earthing switch.
- Pursuit of safety and environment by adopting excellent molding material in tracking.
- Pursuit of minimization of live outcrop which makes good use of bulk mold compound molding technique, and was proven by heat analysis technology.

# **Pursuit of Environmental Design**

- ●No use of the six hazardous substances (mercury, cadmium, lead, hexavalent chromium, PBB and PBDE), a measure that exceeds the requirements of RoHS standards.\* One example is use of a rust-proofing treatment for small parts such as pins and screws that is free of hexavalent chromium, a substance known to contaminate soil.
- Except 2500A and fixed (type L)
- •Marking of main resin materials to facilitate recycling.

# CONSTRUCTION

# Cutting-edge Technologies Using 3D CAD and CAE to Ensure the Utmost Levels of Reliability and Safety

# 1. VCB Structure (10-VPR-D)

- •Through use of thermal fluid analysis, we have realized efficient release of heat to the cylinder-shaped insulation frame covering the VCB main circuit part, enabling a self-cooling mechanism up to a rated current of 3150A.
- Compound insulation of insulated parts and air has been optimized through analysis and testing, resulting in a basic impulse level (BIL) up to 95kV, yet at a size equivalent to the previous 10-VPR-C Series.
- Materials with superior tracking resistance have been adopted and a cylindrical shape realized through stress analysis of the insulation frame and cutting-edge molding technology.
- Improved safety through insulation of live parts to prevent short circuits caused by intrusion of small animals.




Fig.1 Example of thermal fluid analysis.

# 2. Vacuum Interrupter (VI)

- •VIs with even higher reliability through utilization of computer-aided engineering (CAE) technology and backed by record of manufacturing 4.6 million\*\* VIs in over 50 years of manufacturing experience that has seen us capture the top share of the market in Japan.
- •In addition to adopting spiral contacts, improvements in contact materials, and tests utilizing electromagnetic analysis and arc behavior observations have realized a 16% size reduction compared to the VI in the previous 10-VPR-32D type. \*\* As of 2018





Fig. 2 Three-dimensional model of a VI.

# **Optical Observation for Arc Behavior**



Arc behavior was observed via a high-speed camera at the time of interruption between the fixed and moving contacts (see Fig. 4).




Fig. 4 Observation of arc behavior in an internal VI.

Current flows along the spiral electrode causing a radial magnetic field which generates an electromagnetic force circumferentially towards the contacts. This results in arcs that rotate circumferentially on the contact surface.

# 3. Operating Mechanism (10-VPR-D)

- •Greater performance reliability and extension of the lubrication cycle from three to six years through measures for the operating mechanism such as minimizing the number of parts, reducing the number of moving parts, adopting oilless bearings and use of a long-life grease.
- •More reliable distribution of operating friction (which, due to the addition of a spring load, is difficult to verify/evaluate) has been achieved thanks to utilization of a three-dimensional mechanical simulation used to switch operation from the operating mechanism to a VI contact.







Fig. 5 Example of the three-dimensional mechanism simulation.

5


SELECTION

# **Type Selection**


# 3/6-VPR-D

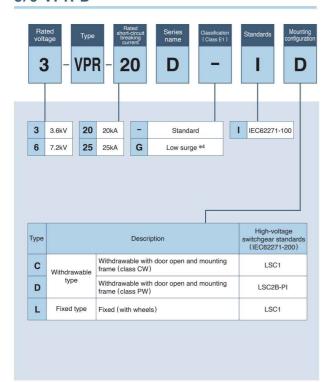


# 10-VPR-D

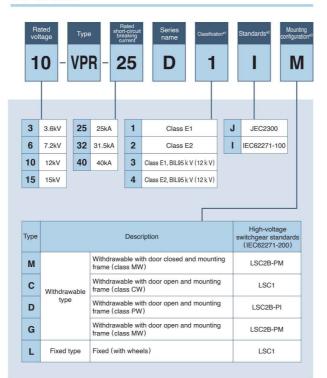

# 10-VPR-25D (M)

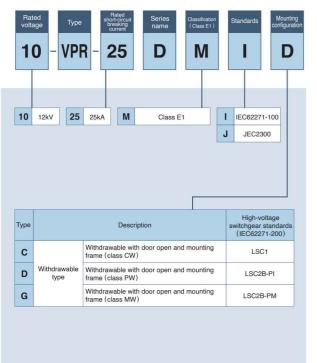


# 10-VPR-50C (D)

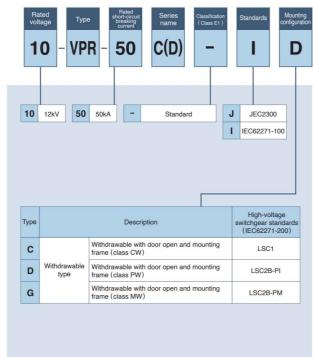


- %1 Rated short-circuit breaking current of 40kA with E2 class cannot be manufactured.
- And basic impulse level (BIL) with rated voltage 12kV has BIL 75kV (classification 1 or 2) and BIL 95kV (classification 3 or 4). %2 When selecting JEC 2300-2010 for standard, select class E1 for classification.
- 3 Fixed (type-L) with rated current of 2500A and 3000/3150A cannot be manufactured.
- In addition, fixed (type-L) with the rated voltage 15kV BIL 95kV cannot be manufactured.
- \*4 Low surge types are only available for 630/1250A of 3/6-VPR VCBs.
- %5 Fixed (type-L) with rated current of 2000A cannot be manufactured.

LSC2B-PI: Partitions in all compartments LSC2B-PM: Partitions in all compartments


# 20-VPR-D

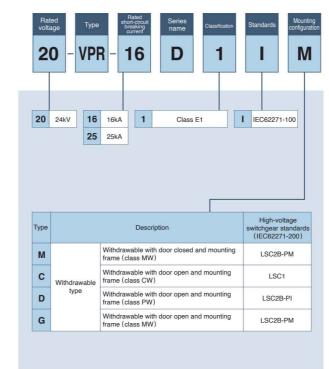

# 20-VPR-D (Fixed type L)

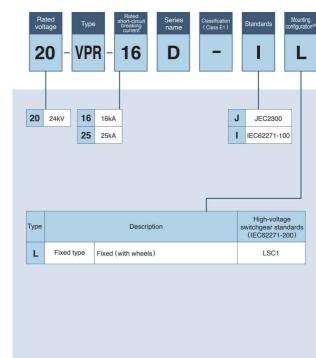

## 20-VPR-D 2500A

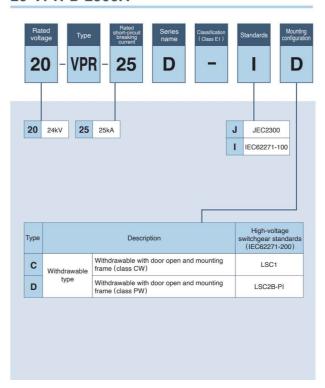

[Notes] PI : Partitions are provided one or more non-metallic partitions or shutters. PM : All partitions are provided metallic partitions and shutters.



# ■ List of Ratings (JEC/IEC Standards)

RATINGS















(OLO/ILO Standardo)			0.01		5		V 1.33		2.		V		1.4.			
Table 1 List of Rating	js .		3-V	PR-D		10-VPR-25D(M)		10-VPRD		10-VPR-50C(D)		15-VPR-D	)	20-V	PR-D	20-VPR-D
Туре		3-VPR-20D	3-VPR-25D	6-VPR-20D	6-VPR-25D	10-VPR-25D (M) **4	10-VPR-25D	10-VPR-32D	10-VPR-40D	10-VPR-50C(D)	15-VPR-25D	15-VPR-32	D 15-VPR-40D	20-VPR-16D		20-VPR-25D
Low surge		0	0	0	0	-	-	-1		-	-	= 1	-			-
Closing operating mech	hanism	Motorspring cha	arged mechanism	Motorspring cha	arged mechanism	Motorspring charged mechanism			charged mechani	ism	Motorspr	ring charged	mechanism		Motorspring char	-
Standards**1			-100 (2008)	IEC 62271	- -100 (2008)	JEC 2300 IEC 62271-100 (2012)		JEC 230 IEC 62271-100		JEC 2300 IEC 62271-100 (2003)	IEC	62271-100	(2012)	IEC 6227	′1-100 <sup>※6</sup>	JEC 2300 IEC 62271-100 (2003)
Rated voltage (kV)		3	3.6	7	7.2	12		12		,		15			24	1
Rated normal current (	(A)		30 250		30 250	600/630 1200/1250	1600 2000 2500 3000/3150	600/630 1200/1250 1600 2000 2500 3000/3150		4000	630 1250 1600 2000		1250 1600		30 50 0 <sup>*7</sup>	2500
Rated frequency (Hz)			)/60		)/60	50/60		50/60	_			50/60			50/	
Rated short-circuit brea		20	25	20	25	25	25	31.5	40	50	25	31.5	40	16		25
Rated making current (kA)	JEC IEC	52	65	52	65	63 65	63 65	80 81.9	100	125 130	65	81.9	104	- 41.6	-	65 65
	JEC	52	- 65	52	- 65	25-2	25-2	31.5-2	40-2	50-2	- 00	81.9	104	41.6	_	25-2
Rated short-time withstand current (kA-s)		20-3	25-3	20-3	25-3	25-3	25-3	31.5-3	40-3	50-3	25-3	31.5-3	40-3	16-3		25-3
Rated opening time (s)	)	0.	.03	0.	.03	0.03		0.03	3.00.20			0.03			0.0	13
Rated breaking time (c	cycles)	;	3		3	3		3			3			3		
Rated withstand	Power frequency		/10		20	28/28		28/28		28/28		-/36		5	0	50/50
voltage (kV) (JEC/IEC)			/40	-	60	75/75		75/75, 95		75/75		-/95		-/125		125/125
Tune test slees#2	Mechanical		M2		M2	M2	E4 E0	M2	F4	F4	F.4	M2		M2		
Type test class*2	Electrical	E	<b>E</b> 1	E	<b>E</b> 1	E1	E1, E2		E1	E1	E1	, E2	E1		E:	
	Small capacitive current switching	C	02	(	02	C2	C2 C1			C2 C2		2				
Rated operating	JEC		-	ş	-	O-1min-CO-3min-CO (A) CO-15s-CO (B) O-0.3s-CO-1min-CO (R)		CO-15	-3min-CO (A) s-CO (B) -1min-CO (R)			-		-		O-1min-CO-3min-CO(A) CO-15s-CO(B) O-0.3s-CO-1min-CO(R)
sequence	IEC	O-1min-CO-3min-CO CO-15s-CO O-0.3s-CO-1min-CO		CO-1	O-3min-CO 5s-CO O-1min-CO	O-3min-CO-3min-CO CO-15s-CO O-0.3s-CO-1min-CO		CO-15s-CO CO-15s-CC		O-1min-CO-3min-CO CO-15s-CO O-0.3s-CO-1min-CO	CO-15s-CO		O-3min-CC CO-15 O-0.3s-CC	is-CO	O-1min-CO-3min-CO O-0.3s-CO-3min-CO	
No-load closing time (s	s)	0	).1	0	).1	0.1		(	0.1			0.1			0.	1
Closeing operating/ control current (A)	Motor		arging time 8s) 100V)		arging time 8s) 100V)	1 (motor charging time 8s) (DC110V)			arging time 6s)	1.5 (motor charging time 10s) (DC100V)	1.2 (m	otor charging (DC110V)			rging time 8s) 00V)	1.2 (motor charging time 6s) (DC100V)
control current (71)	Control current (Closing coil)	3.5 (DC100V)		3.5 (D	C110V)	4 (DC110V)		3.5 (	C110V)	3.2 (DC100V)		3.5 (DC110)	V)	4(DC	100V)	4.5 (DC100V)
Tripping device		Shunt trippir	ng coil (STC)	Shunt trippin	ng coil (STC)	Shunt tripping coil (STC)		Shun	t tripping coil (ST	C)	Shur	nt tripping coi	il (STC)		Shunt trippin	g coil (STC)
Operating control curre	ent (A) (STC)	3.5 3.5			3.4	4		3.2	4		3.4 4					
Auxiliary switch  Opening conter (mecha	anias!)		a5b		a5b	5a5b			n be add)**3 equipment	10a10b	5a5b (can be add)**3 Standard equipment			Standard o		
Mounting configuration		Fixed (	equipment (type L)	Fixed	equipment (type L)	Standard equipment  Withdrawable (types C, D, G)		Fixed (t	ype L) **4,5	Withdrawable (types C, D, G)		vable (types			Standard e	Withdrawable (types C, D)
	T		e (types C, D) surge : 55)		e (types C, D) surge : 55)	100			types M, C, D, G) , D, G, L:112	- (types C, D, G)		124 C, D, (		Withdrawable (ty C, D, G:94 M:102 L:90		-
	600A/630A 1200A/1250A		surge : 55) surge : 59)		surge : 55)	100			, D, G, L:112 , D, G, L:112	-		124 C, D, C		C, D, G:94 M:102 L:90 C, D, G:107 M:115 L:91		<u>-</u>
Mass of VCB (kg)	1600A/2000A		- 59)		- 59)	-			, D, G, L:112 , D, G, L:140	_		152 C, D, C		C, D, G:1		
doo or vob (kg)	2500A ~ 3150A				_	=,			C. D. G:188	_	IVI -	-	J. 170	C, D, G. 1		330
	4000A		_		_	_			- -	440				-		-
	600A/630A		D:34		D:34	C:59 D, G:65			D, G:64	-		C:59 D, G:	64	6	)	_
	1200A/1250A	100	D:42		D:42	C:59 D, G:65			D, G:64	-		C:59 D, G:		6		-
Mass of	1600A/2000A		-	***	-	-			D, G:70	_		C:65 D, G:		7		-
mounting frame (kg)	2500A ~ 3150A		_		_	=.			D, G:92	-		C:87 D, G:		-		C:156 D:160
	4000A		-		-	<u>=</u>			-	C:235 D, G:240		-		-		-
External dimensions re	eference page	P11	~P14	P11	~P14	P15~P16		P17	~P24			P17~P20		P25^	·P30	P31~P32
		20.00	2.3					2.53	Section 1997							- 20

<sup>\*\*1</sup> JEC:Japanese standard, JEC 2300, IEC:International standards, IEC62271-100

\*\*1 JEC:Japanese standards, IEC62271-100

\*\*1 JEC62271-100

\*\*2 JEC62271-100

\*\*2 JEC62271-100

\*\*2 JEC62271-100

\*\*2 JEC62271-100

\*\*2 JEC62271-100

\*\*2 JEC62271-100

\*\*3 JEC62271-100

\*\*4 JEC62271-100

\*\*4

<sup>\*2</sup> Type test class described in IEC62271-100

\*3 Auxiliary switches are available up to 10a10b by adding 5a5b.

In addition, when selecting additional shunt tripping coil from optional accessories, the switches are 3a3b and will be 8a8b by adding 5a5b.

34 Fixed (type L) with the rated voltage 15kV BIL95kV cannot be manufactured.

<sup>##</sup> Fixed (type L) with the lated voltage 15kV bits95kV callifold be manufactured.

## Fixed (type L) for the rated current of 2500A and 3000/3150A cannot be manufactured.


## Fixed currents of 630A and 1250A are IEC62271-100 (2012). Rated current of 2000A is IEC62271-100 (2017).

## Fixed (type L) is IEC62271-100 (2006)

<sup>\*9</sup> Fixed (type L) for the rated current of 2000A cannot be manufactured.


# 5 External Dimensions (1)


# ■ 3/6-VPR-20D, 3/6-VPR-25D 630A Rating External Dimensions (Circuit Breaker)

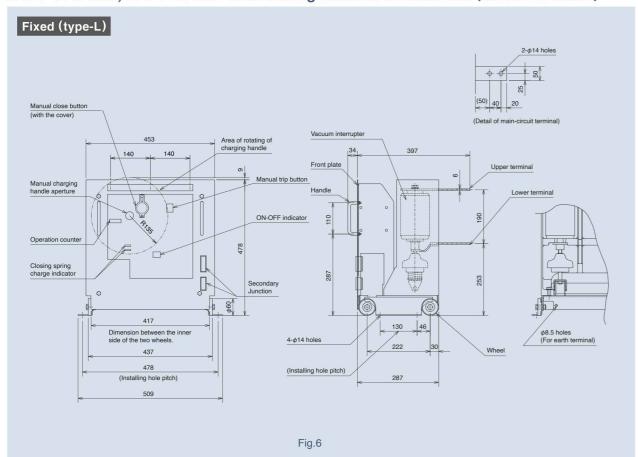

# Manual close button (with the cover) Manual close button (closing spring charge indicator Charge garing charge indicator Interfock lever Draw-cut handle genture Lower terminal Draw-cut handle genture At 3 Draw-cut handle genture At 4 Draw-cut handle genture At 5 Draw-cut handle genture At 7 Draw-cut handle Graw-cut handle Graw-cu


# ■ 3/6-VPR-20D, 3/6-VPR-25D 630A Rating External Dimensions (Mounting Frame)

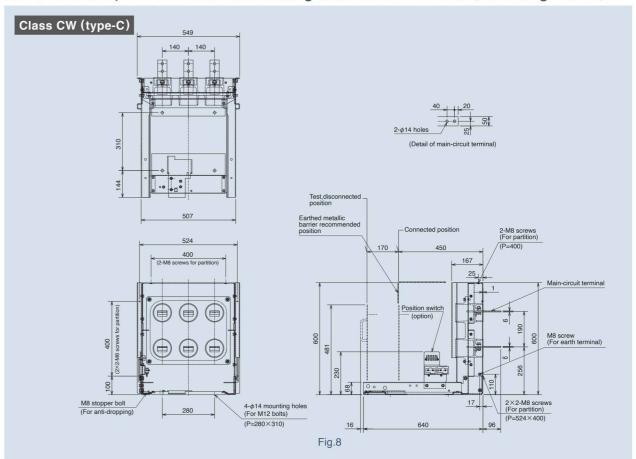


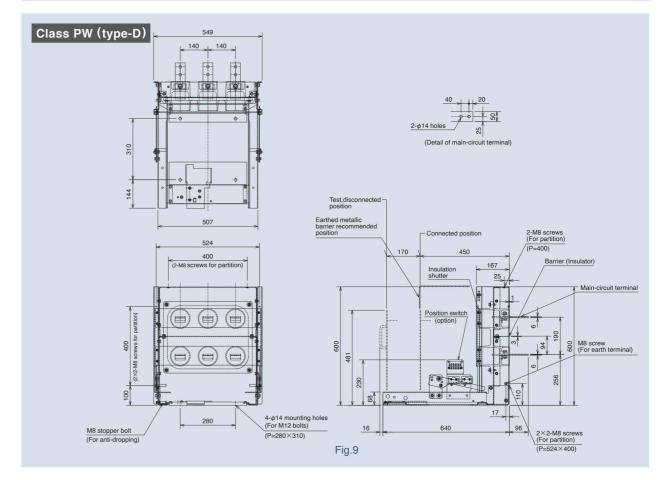


# 5 External Dimensions (2)


# ■ 3/6-VPR-20D, 3/6-VPR-25D 1250A Rating External Dimensions (Circuit Breaker)

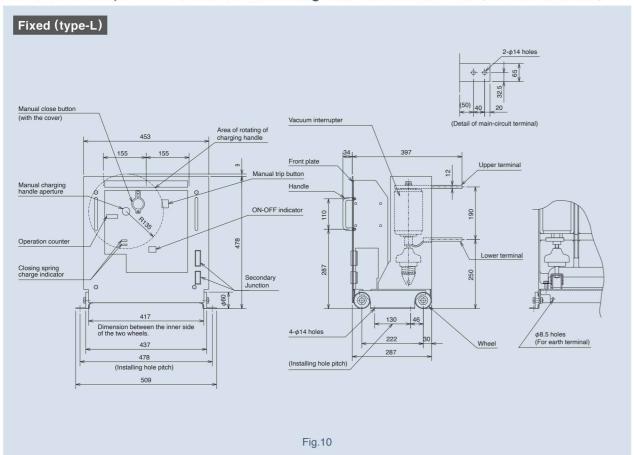

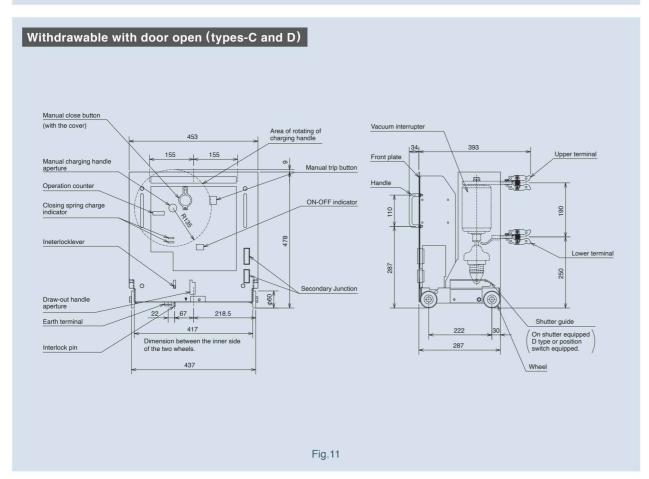


# ■ 3/6-VPR-20D, 3/6-VPR-25D 630A Rating External Dimensions (Mounting Frame)

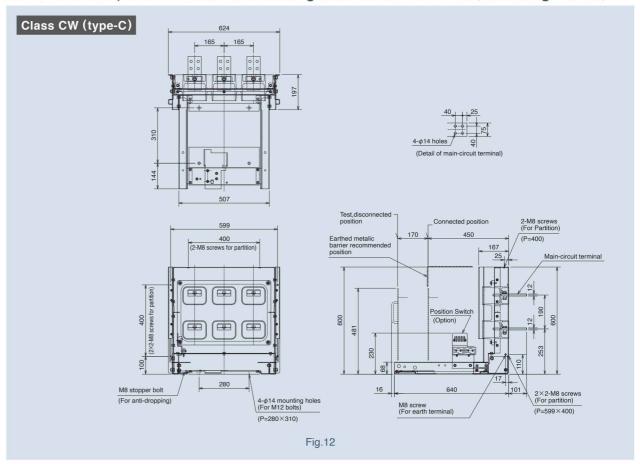


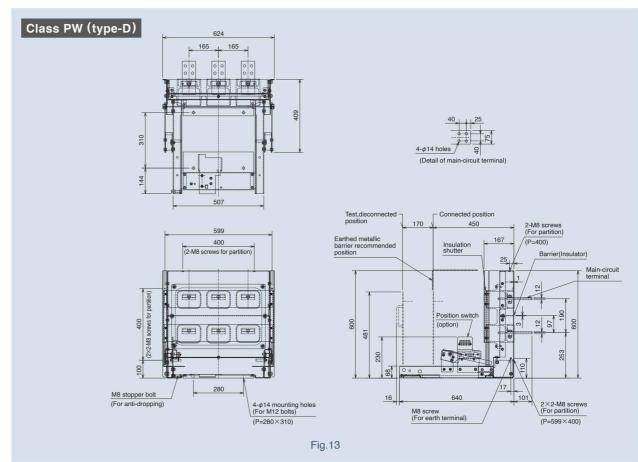


■ 10-VPR-25D (M) 600A/630A, 1200A/1250A Rating External Dimensions (Circuit Breaker)

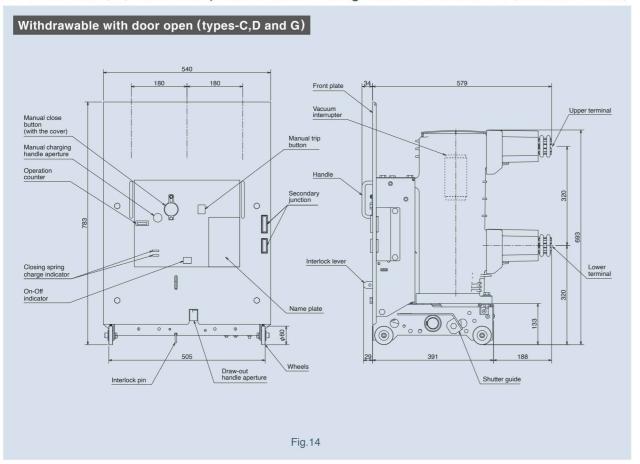


■ 10-VPR-25D (M) 600A/630A, 1200A/1250A Rating External Dimensions (Mounting Frame)

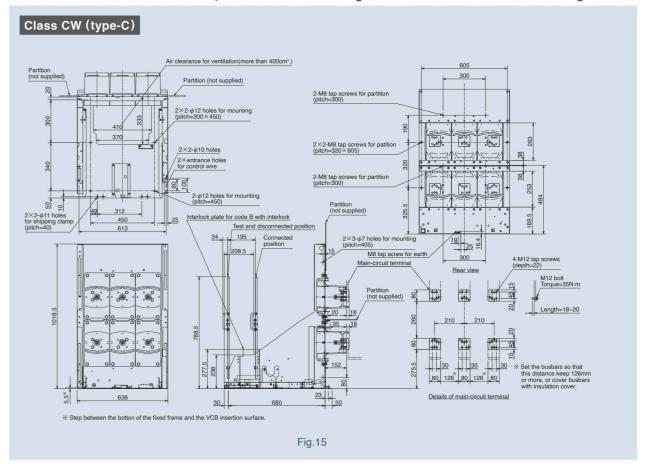

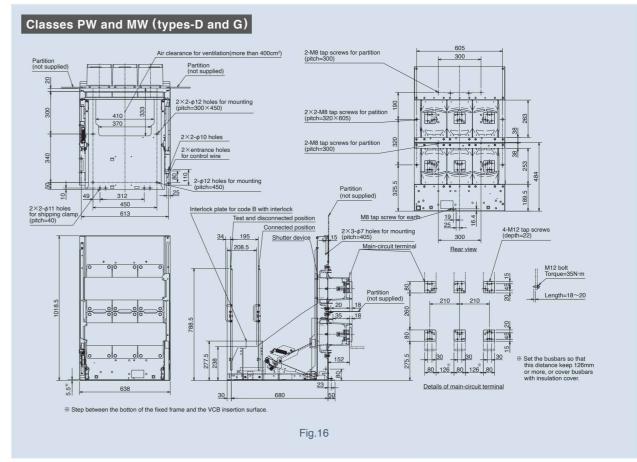


# **External Dimensions (4)**


■ 10-VPR-D 600A/630A, 1200A/1250A Rating : External Dimensions (Circuit Breaker)

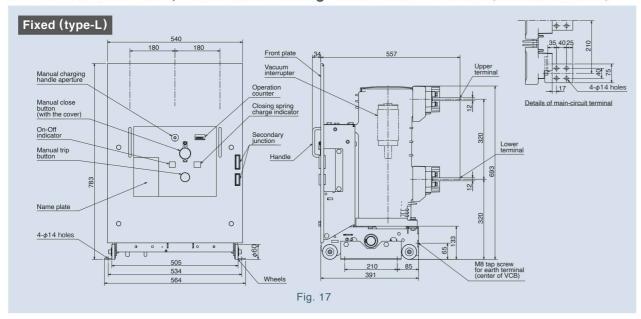


■ 10/15-VPR-D 600A/630A, 1200A/1250A Rating : External Dimensions (Circuit Breaker)

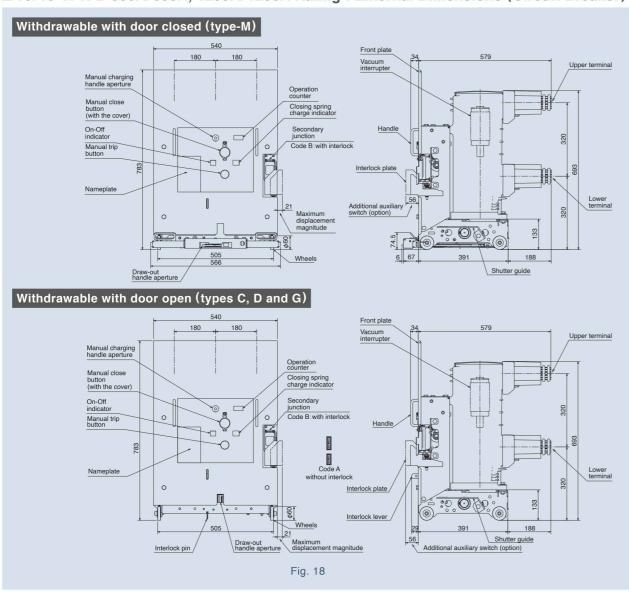


■ 10/15-VPR-D 600A/630A, 1200A/1250A Rating: External Dimensions (Mounting Frame)

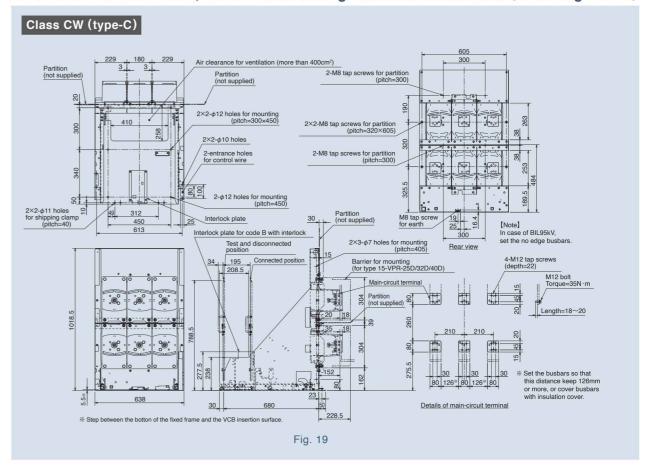

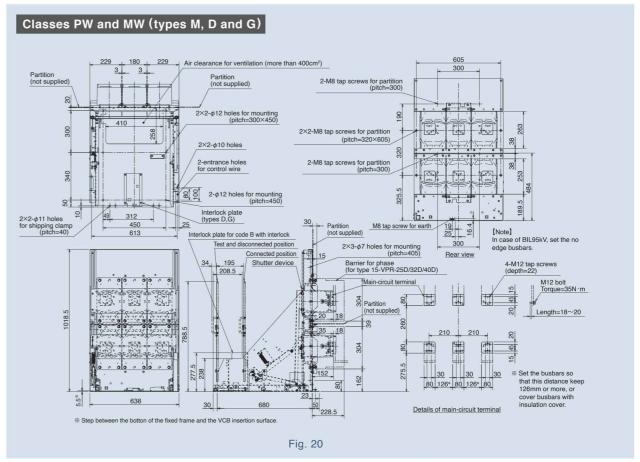


# 5 External Dimensions (5)


# ■ 10-VPR-D 1600A, 2000A Rating : External Dimensions (Circuit Breaker)

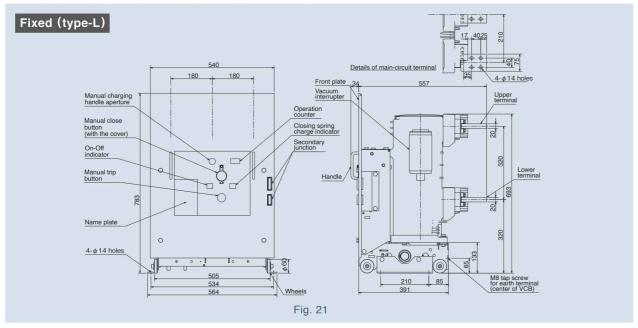


# ■ 10/15-VPR-D 1600A, 2000A Rating: External Dimensions (Circuit Breaker)

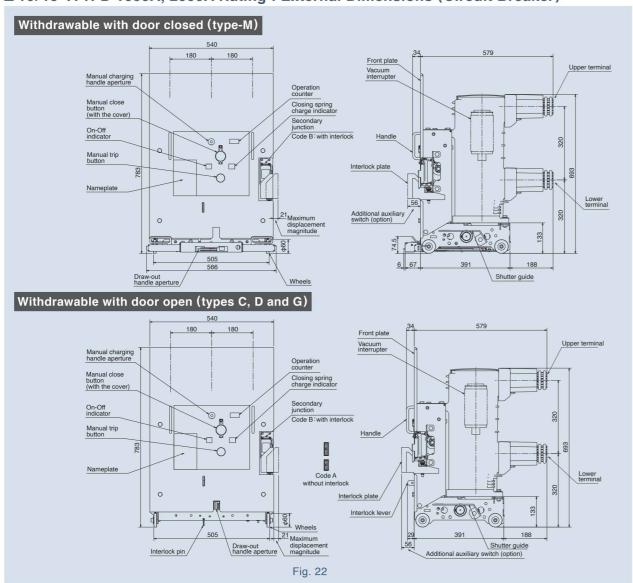

# ■ 10/15-VPR-D 1600A, 2000A Rating: External Dimensions (Mounting Frame)

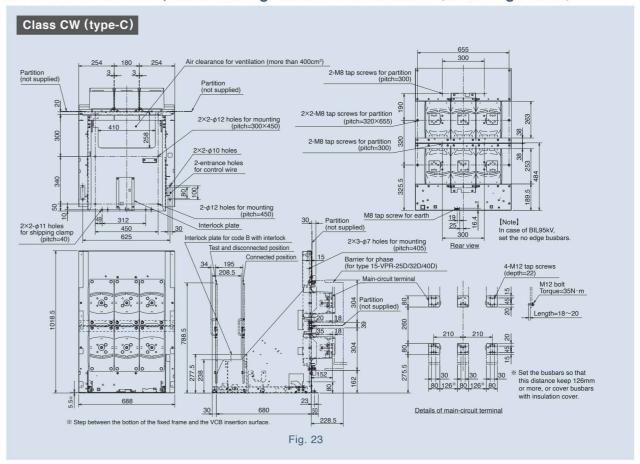

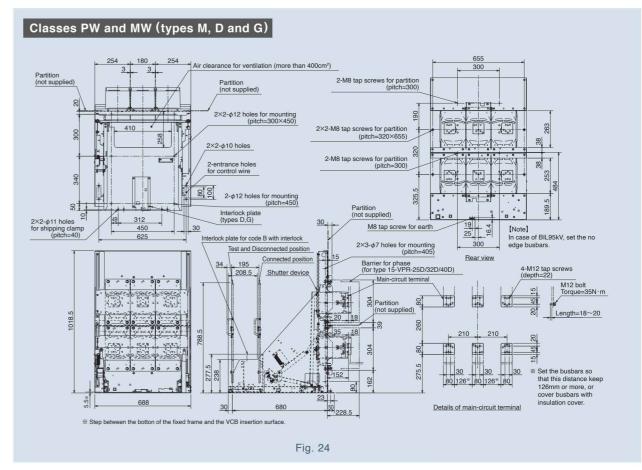

# 5 External Dimensions (6)

# ■ 10-VPR-D 2500A, 3000A/3150A Rating: External Dimensions (Circuit Breaker)



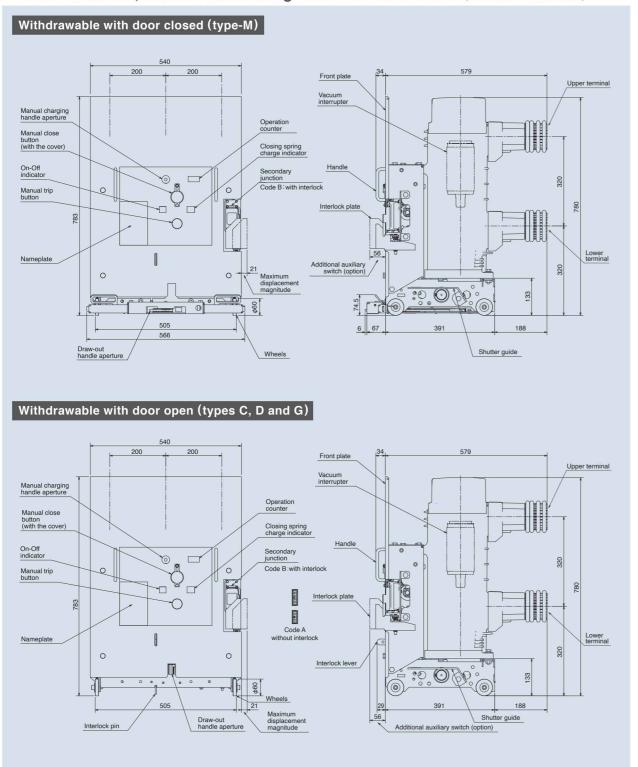


Fig. 25


# ■ 10-VPR-D 2500A, 3000A/3150A Rating: External Dimensions (Mounting Frame)

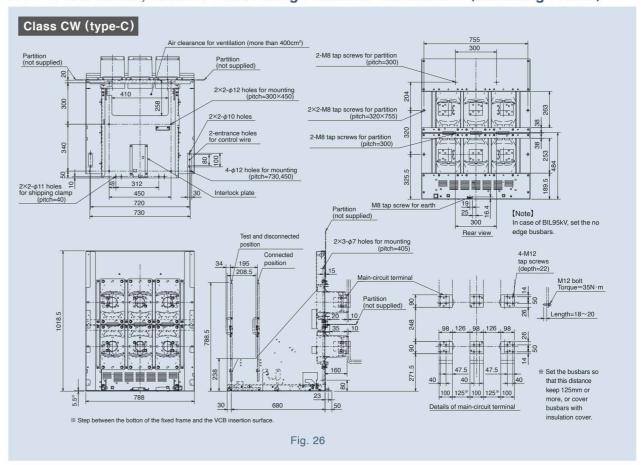


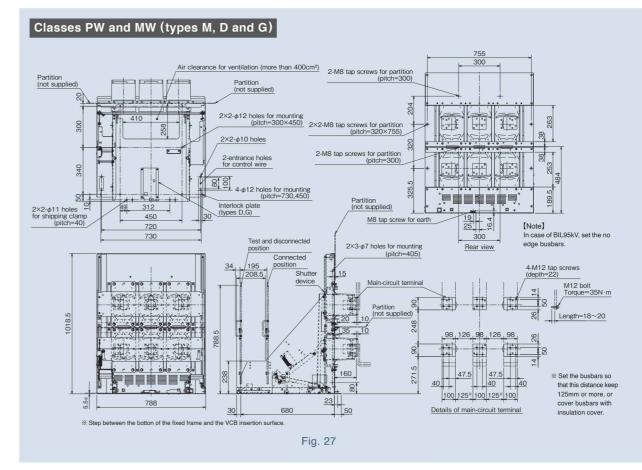


# ■ 10-VPR50C(D) 4000A Rating External Dimensions (Circuit Breaker)

**External Dimensions (7)** 

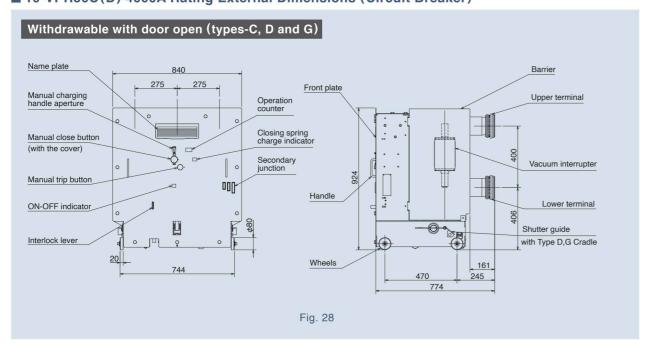

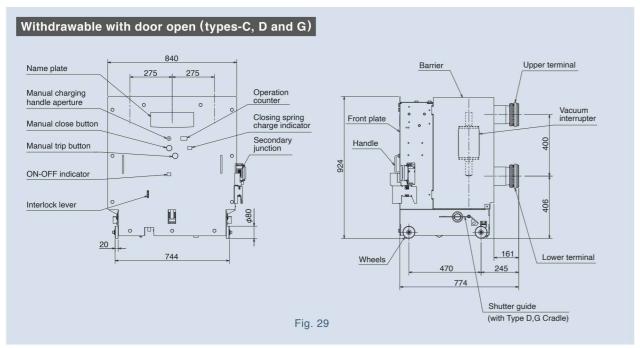

# ■ 10-VPR50C(D) 4000A Rating External Dimensions (Mounting Frame)

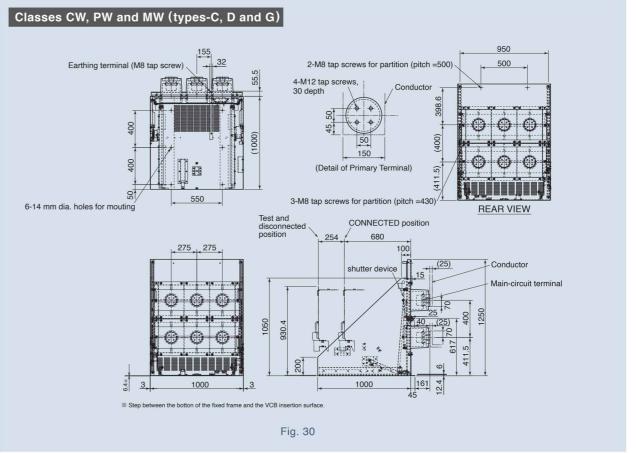



[Note] class CW : Shutter device is not equipped.


5

# ■ 20-VPR-D 630A, 1250A Rating External Dimensions (Circuit Breaker)

**External Dimensions (8)** 

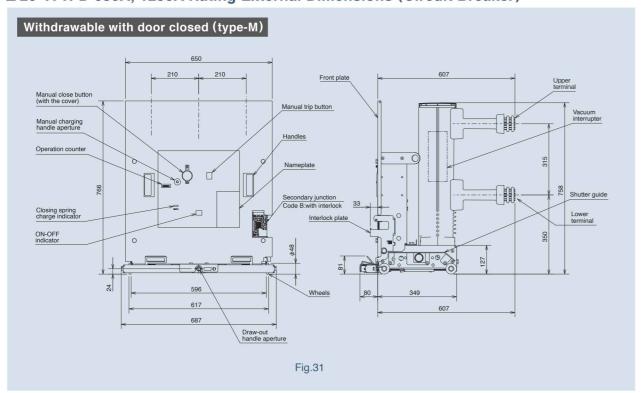

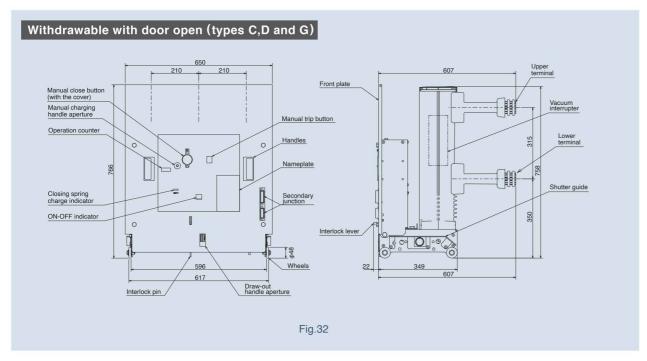


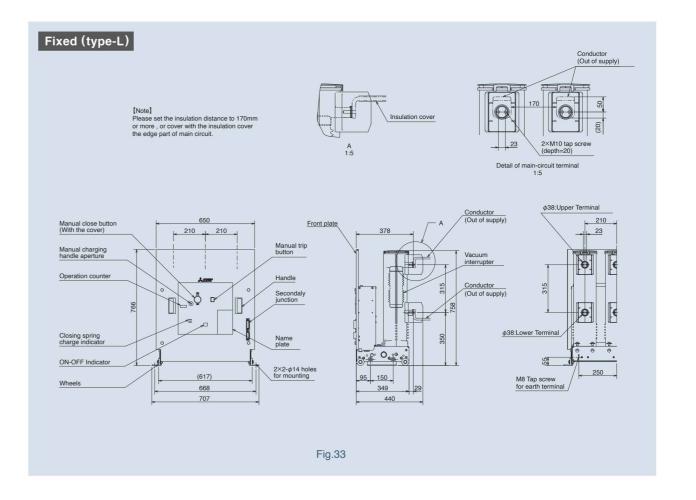


5

# ■ 20-VPR-D 630A, 1250A Rating External Dimensions (Mounting frame)

**External Dimensions (9)** 

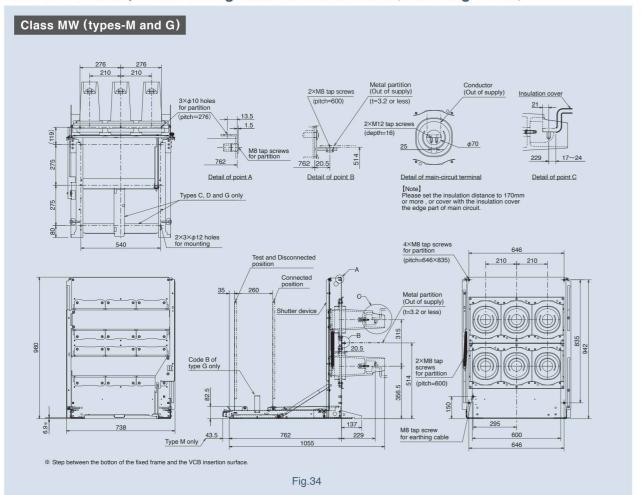

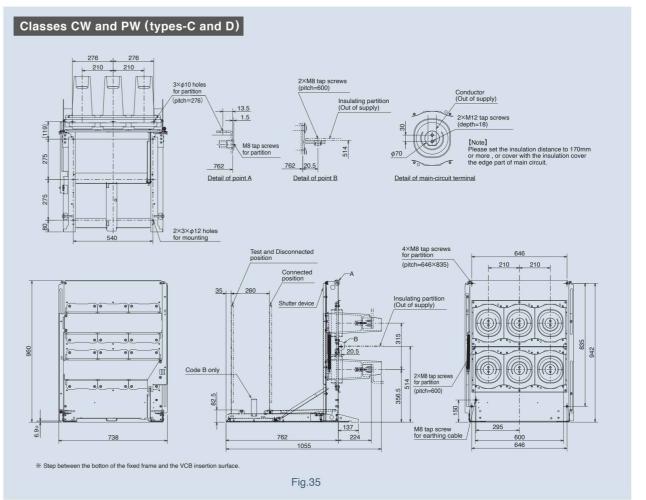

[Note] class CW: Shutter device is not equipped.


Table 2 Mounting configuration.


Туре	Description	High-voltage switchgear standards		
М	Withdrawable with door closed and mounting frame (class MW)	LSC2B-PM		
G	Withdrawable with door open and mounting frame (class MW)			
D	Withdrawable with door open and mounting frame (class PW)	LSC2B-PI		
С	Withdrawable with door open and mounting frame (class CW)	LSC1		

[Notes] PM: All partitions are provided metallic partitions and shutters.
PI: Partitions are provided one or more non-metallic partitions or shutters.


# 5 External Dimensions (10)


# ■ 20-VPR-D 2000A Rating External Dimensions (Circuit Breaker)

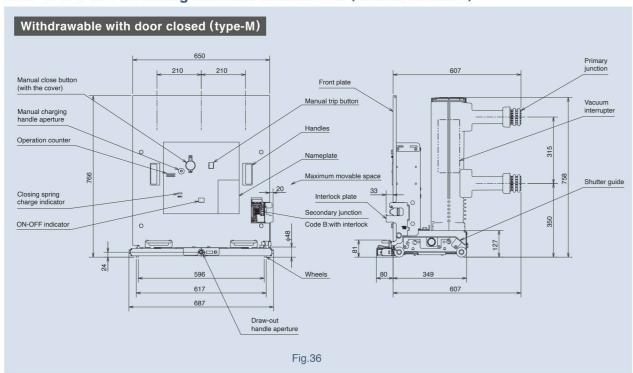

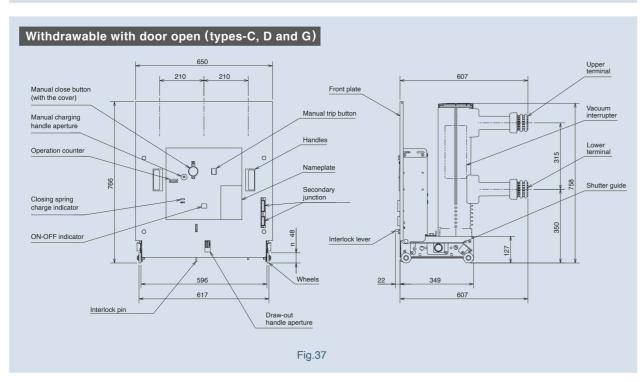


# ■ 20-VPR-D 2000A Rating External Dimensions (Circuit Breaker)

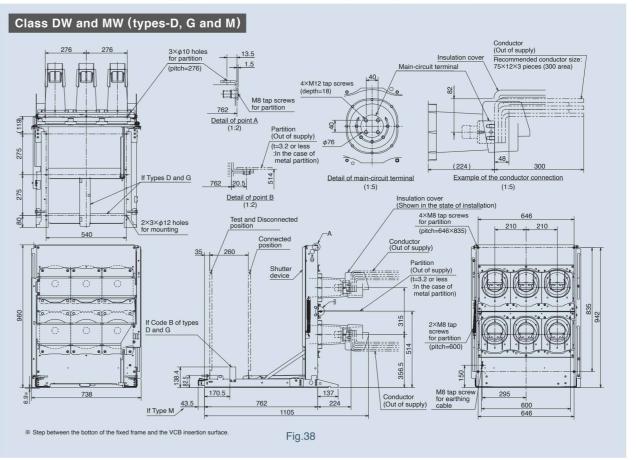

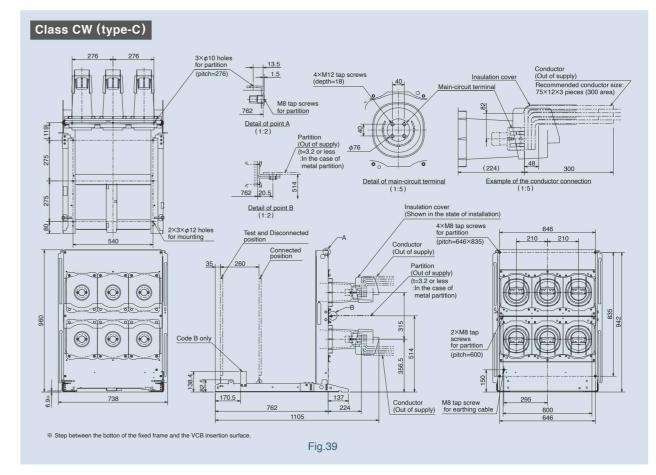


**EXTERNAL DIMENSIONS** 

# ■ 20-VPR-D 2500A Rating External Dimensions (Circuit Breaker)

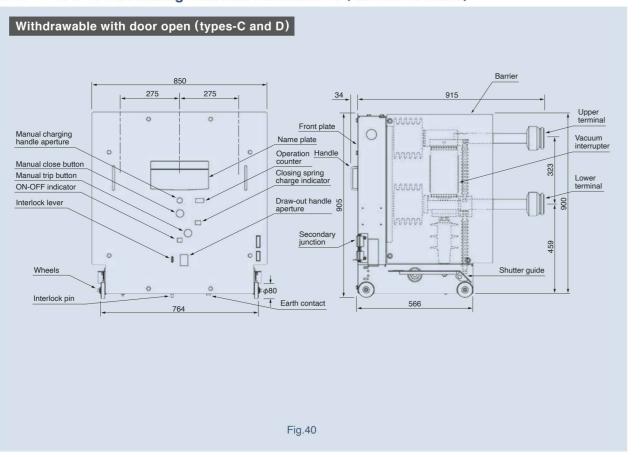


# ■ 20-VPR-D 2500A Rating External Dimensions (Mounting Frame)

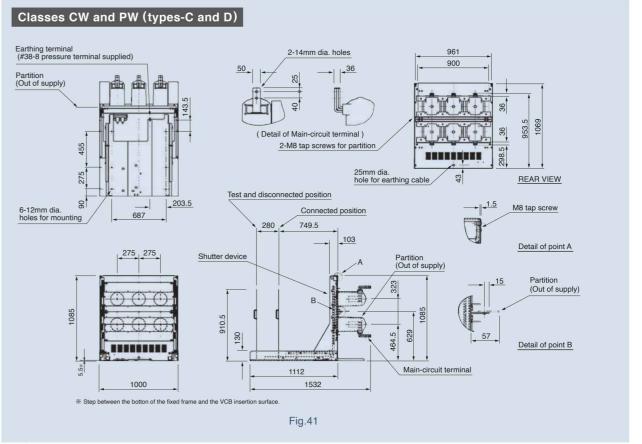


[Note] class CW : Shutter device is not equipped.


# 6 Connection Diagrams (1)

■3/6-VPR-20D/25D (630A, 1250A) 10-VPR-25D(M) 20-VPR-16D/25D (630A, 1250A, 2000A)

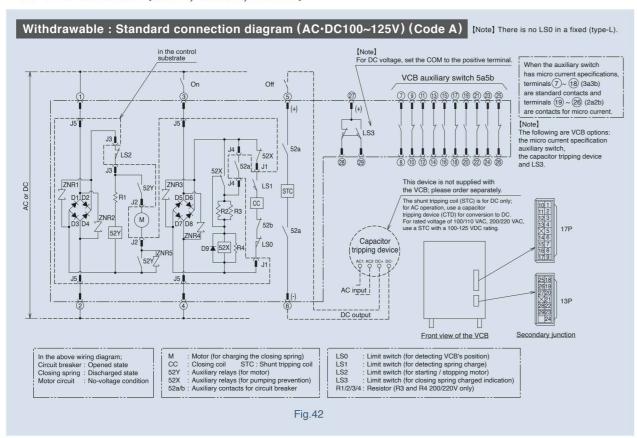


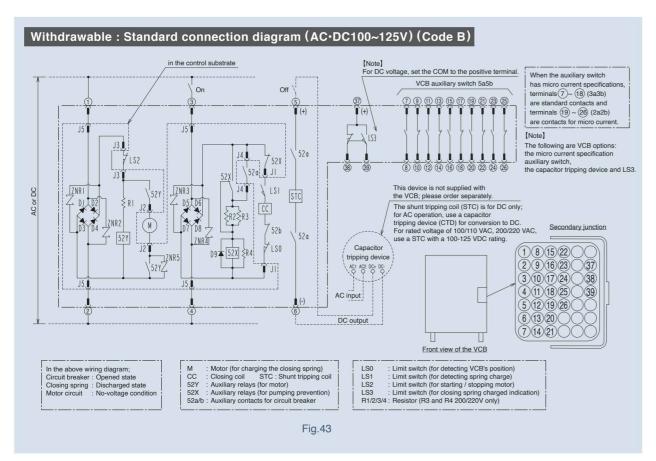

# ■ 10-VPR-50C (D)

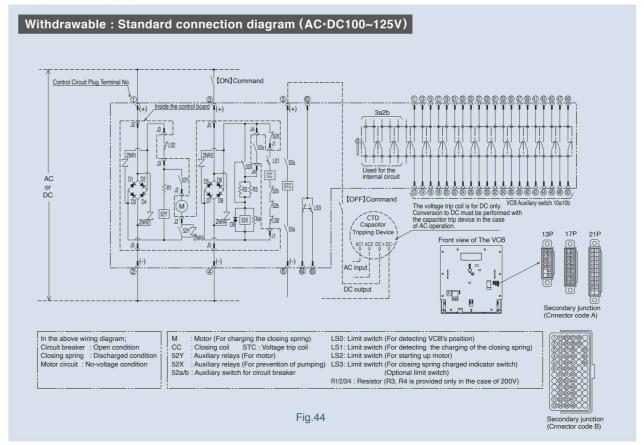



# ■ 20-VPR-25D 2500A

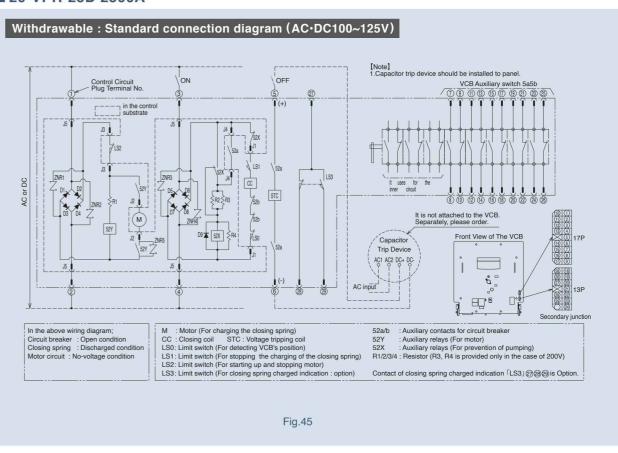

# 6 Connection Diagrams (2)

# ■ 3/6/10/15-VPR-25D/32D/40D

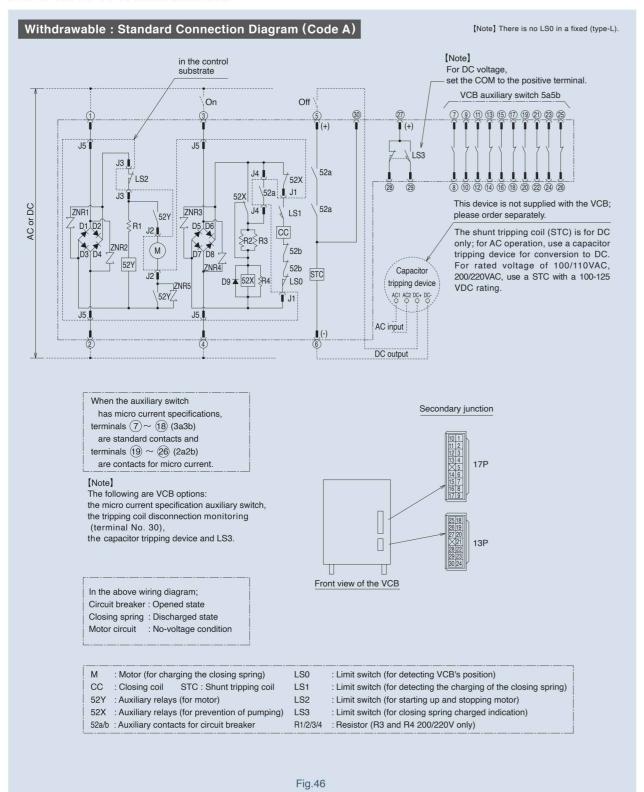

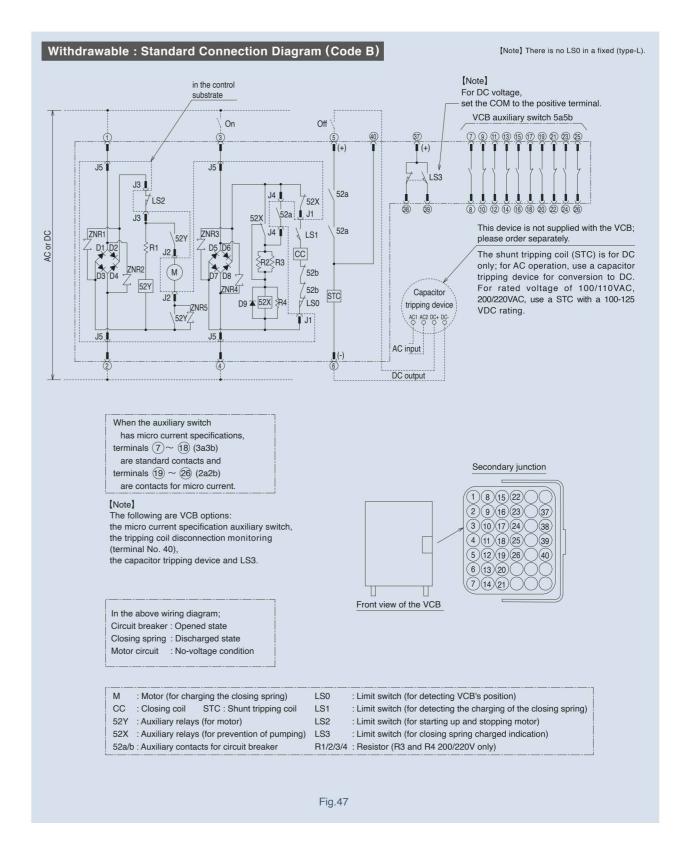

**CONNECTION DIAGRAMS** 

**ACCESSORIES** 

# Accessories

Table 3 Accessories 3/6-VPR-D				10-VPR-25D (M)	10-VPR-D	10-VPR-50C(D)	15-VPR-D	20-VPR-D	20-VPR-D	
Туре	3-VPR-20D	3-VPR-25D	6-VPR-20D	6-VPR-25D	10-VPR-25D(M)	10-VPR-25D/32D/40D	10-VPR-50C(D)	15-VPR-25D/32D/40D	20-VPR-16D/25D	20-VPR-25D (2500A)
Secondary Connector	0	0	0	0	0	0	0	0	0	0
Manual Charging Handle	0	0	0	0	0	0	0	0	0	0
Insertion/Draw-out Handles	0	0	0	0	0	0	0	0	0	0
Lifting Adapter	-	-	-	-	0	0	0	0	0	0
Shipping Clamp	0	0	0	0	0	0	_	0	-	=
Wipe Gauge	-	-	-	-	-	-	0	=	-	0
Sloped Platform	-	-	-	-	-	-	-	-	○*1	

<sup>%1</sup> Only types C, D and G of 630A/1250A.

Code A

Code B

# ■ Secondary Connector (Lead wires 1.5m)



input voltage and VCB unit. They are inserted in the control plug section of the

Number of accessories:1 per unit

Fig.48

# ■ Manual Charging Handle



manually by inserting the handle in the front manual charging handle aperture and rotating clockwise for approximately 15 rotations.

Number of accessories:1 per 1-5 VCBs (min. 1)

Fig.49

# ■ Insertion/Draw-out Handles





A lifting adapter used to lift the VCB. Please refer to the directions for use in the instruction manual.

Number of accessories: 1 per 1-5 VCBs (min. 1)

Fig.51

# ■ Shipping Clamp (for 10-VPR-D series)



600~2000A

2500~3150A Fig.52 (shipped with a panel)




For Types C, D and G

These are fixtures for shipping the VCB and a mounting frame together. Use them as described in the instruction manual.

Number of accessories:1 per unit

Fig.53

# **■** Wipe Gauge



For 10-VPR-50C(D)


For 20-VPR-D 2500A

Wheter the wipe quantity is within the allowable range or not can be judged using awipe gauge during in spection. Please use according to instruction manual. 1 per 1-5 VCBs(min 1)

Fig.54

# Optional Accessories

# **■ VCB Configuration**

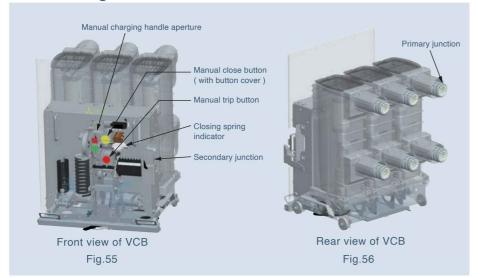

# ■ Mounting Frame Configuration

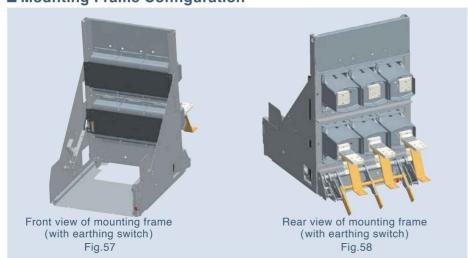





Table 4 Ontional Assessaries			8.							
Table 4 Optional Accessories		3/6-VF	PR-D		10-VPR-25D(M)	10-VPR-D	10-VPR-50C(D)	15-VPR-D	20-VPR-D	20-VPR-D
Туре	3-VPR-20D	3-VPR-25D	6-VPR-20D	6-VPR-25D	10-VPR-25D(M)	10-VPR-25D/32D/40D	10-VPR-50C(D)	15-VPR-25D/32D/40D	20-VPR-16D/25D	20-VPR-25D (2500A)
Low surge	0	0	0	0	-	-	-	-	=	-
Closing spring charged indication switch	0	0	0	0	0	0	0	0	0	0
Mechanical locking device	-	-	-	-	-	0	-	0	=	-
Tripping coil disconnection monitoring	-	-	-	-	_	0	-	0	0	-
Additional auxiliary switch	-	-	-	-	=	0	-	0	=	-
Additional shunt tripping coil		-	-	-	-	0	-	0	-	-
Draw-out mechanism padlock device	0	0	0	0	0	0	-	0	0	=
Padlock device for close and trip button		-	-	-	0	0	-	0	0	
Position switch	0	0	0	0	0	0	0	0	0	0
Earthing switch	-	-	-	-	0	0	-	0	0	<del>-</del>
Short-circuit capacity earthing	-	-	-	-	-	0	-	0	-	_
Optional terminal ( V:Vertical, H:Horizontal )	-	-	-	-	0	0	-	0	-	-
Shutter padlock device	-	*	-	-	0	0	0	0	0	_

OPTIONAL ACCESSORIES

OPTIONAL ACCESSORIES

# Optional Accessories (1)


# ■ Closing Spring Charged Indication Switch



Used for charging/discharging output of closing springs. The contact number is 1C.

Table 5 Contact ratings.


Rated voltage (V)	Resistance load (A)	Inductive load (A)
125AC/DC	5.5	5.5
250AC/DC	3	1.5

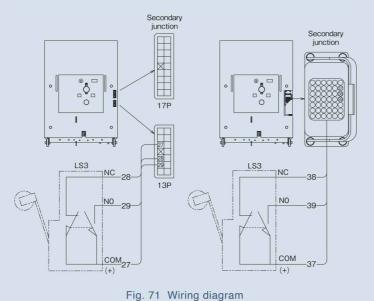

Caution

- Please refer to the standard connection diagram for the VCB (P33 ~ P36).
- Fig. 71 shows a closed spring in a dischrged state
- LS3 (limit switch for the spring charge indicator)
- For DC voltage, set the COM to the positive electrode.

# ■ Mechanical Locking Device



The interlock system is configured to lock the VCB in the off position. To shut down the VCB either automatically or manually requires the VCB to be locked using the key. The key can only be removed after the VCB has been opened and locked. The VCB cannot be closed in this state.

Note that users are responsible for preparing the interlock key; a key will not be supplied by the manufacturer. In addition, note that this feature cannot be used together with the draw-out mechanism padlock device

Table 6 Specifications of key for interlocking.

Manufacturer	Castell		
Model	FS1		
Lock portion symbol	User option		
Key rotation	90 degrees clockwise to trap		
Spigot dimensions	9.5mm <sup>2</sup> X 22mm long		

# **■** Tripping Coil Disconnection Monitoring



This function monitors disconnection of the tripping coil and control connector based on output from the input terminal.

Table 7 Disconnection monitoring current.

Туре	Disconnection monitoring current
10/15-VPR-25D/32D/40D	30mA or below
20-VPR-16D/25D	8mA or below

# ■ Additional Auxiliary Switch (Additional 5a5b)



The switch makes it possible to add 5a5b to a standard 5a5b contact number to create a 10a10b arrangement (the additional auxiliary contact has no settings for micro current contact). It is also possible to create an 8a8b configuration by adding 5a5b to the standard 3a3b contact number through use of the optional additional shunt tripping coil.

Fig. 74

# ■ Additional Shunt Tripping Coil



An additional shunt tripping coil can be arranged through addition of an independent tripping coil. If one of the tripping coils malfunctions, the other tripping coil can still perform tripping.

Fig. 75

# ■ Draw-out Mechanism Padlock Device



This padlock can be used to lock the VCB in the connected position or test / disconnected position. Note that users are responsible for preparing a padlock; a padlock will not be supplied by the manufacturer.

Fig. 7

# ■ Padlock Device for Close and Trip Button



This padlock board can be used to cover the VCB closing and tripping buttons and prevent manual switching operations. Note that users are responsible for preparing a padlock; a padlock will not be supplied by the manufacturer.


Fig. 77

OPTIONAL ACCESSORIES


41

# **Optional Accessories (2)**


# ■ Position switch 3/6-VPR-D (Connected Position/Test and Disconnected Position)

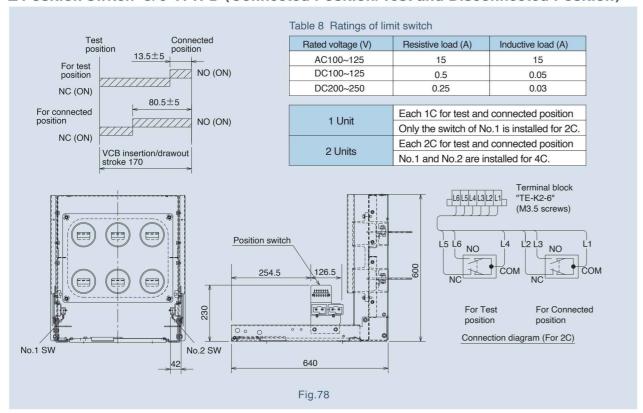


# ■ Position switch 10-VPR-D, 10-VPR-50C(D), 20-VPR-25D 2500A

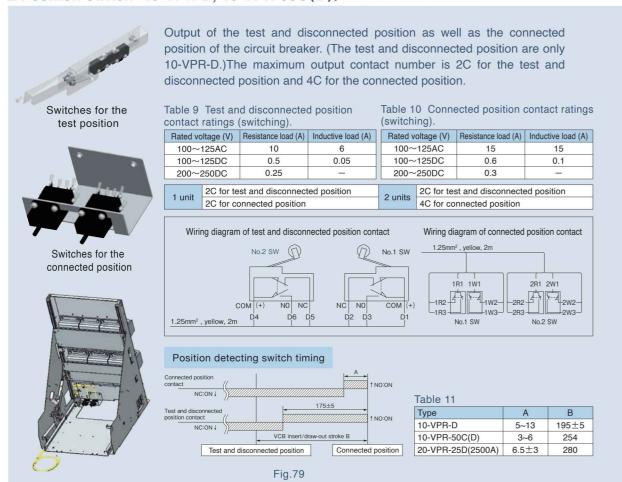

# ■ Position switch 10-VPR-25D(M)

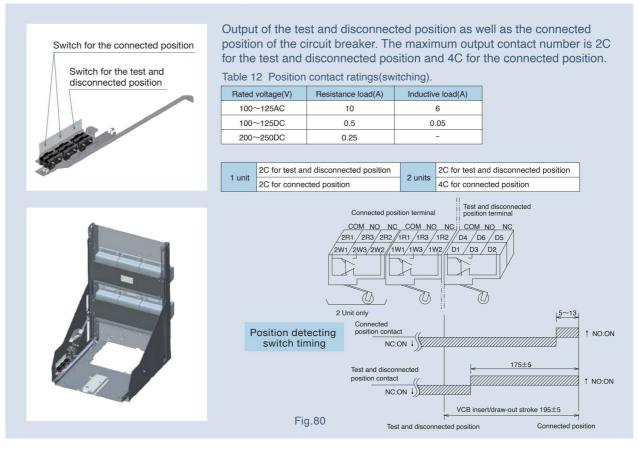


# ■ Position switch 20-VPR-D

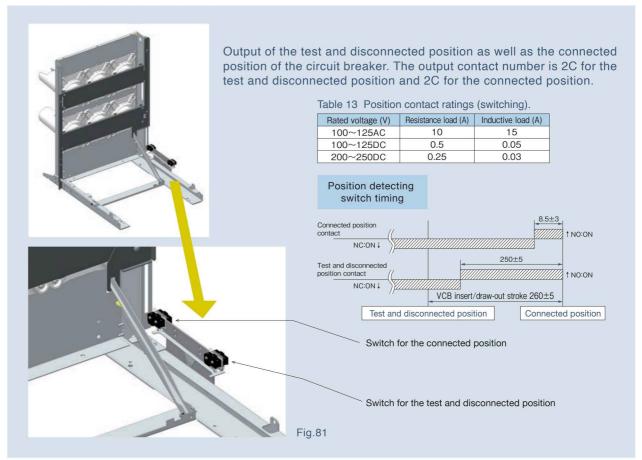


# Optional Accessories (3)

# ■ Short-circuit Capacity Earthing

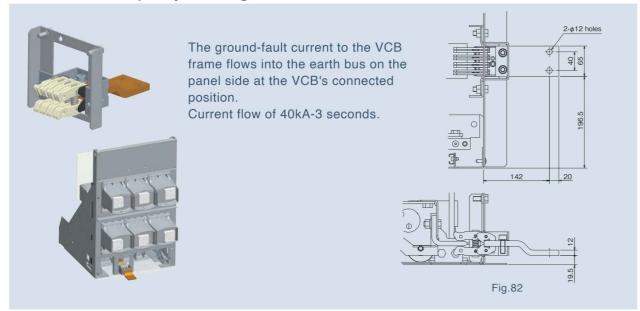

# ■ Optional terminal

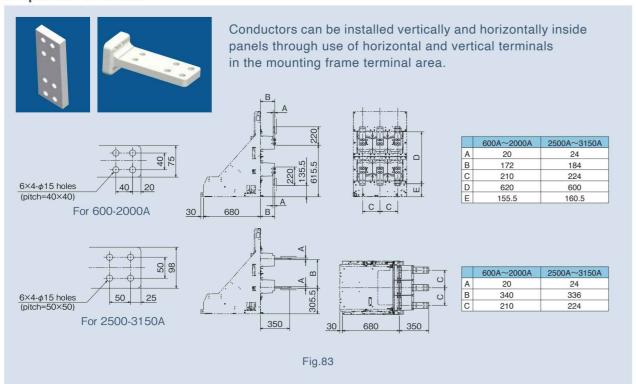

# ■ Shutter Padlock (10-VPR-D)

This padlock prevents release of the shutter in the mounting frame. Note that users are responsible for preparing a padlock; a padlock will not be supplied by the manufacturer.







Fig.84


# ■ Shutter Padlock (20-VPR-D)

This padlock prevents release of the shutter in the mounting frame. Note that users are responsible for preparing a padlock; a padlock will not be supplied by the manufacturer.



Padlock of lower shutter

The shutter is open position

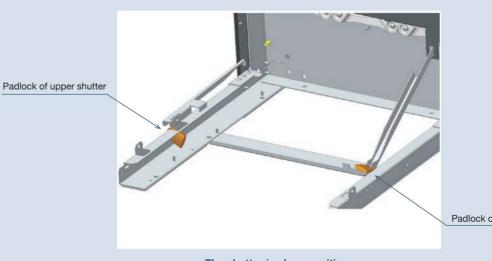

Padlock of lower shutter

The shutter is close position


Fig.85

[Note] This accessory is standard equipment.

**OPTIONAL ACCESSORIES** 

# **Optional Accessories (4)**

# ■ Earthing Switch (ES) (10-VPR-D)

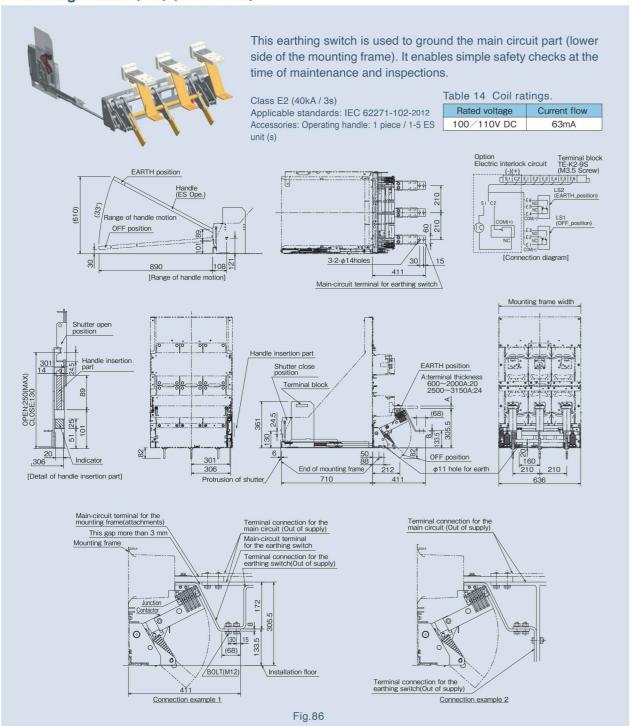

# ■ Earthing Switch (ES) (20-VPR-D)

This earthing switch is used to ground the main circuit part (lower side of the mounting frame). It enables simple safety checks at the time of maintenances and inspections.

Applicable standards: IEC 62271-102-2018 Accessories: Operating handle: 1 piece / 1-5 ES unit (s) Not applicable to RoHS standard.

Table 15 Coil ratings


Rated voltage	Current flow
100/110V DC	63mA

Table 16 Indication switch contact ratings.

Rated voltage (V)	Resistance load (A)	Inductive load (A
125AC/DC	5.5	5.5
250AC/DC	3	1.5


Table 17

Rated normal current (A)	Α	В
630, 1250	492	12
2000	536	20



Connection diagram.

(This connection diagram shows ES OFF position)

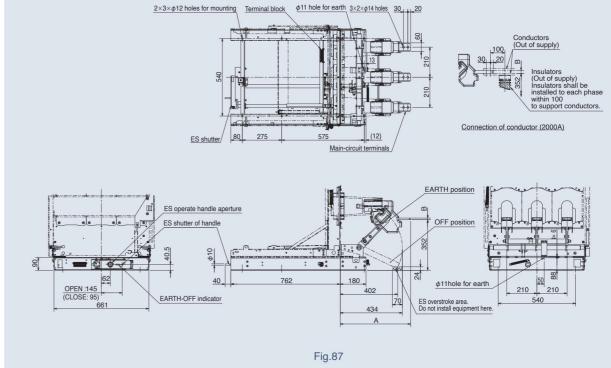

# ■ Surge Absorbing Capacitor (CR Suppressor) Sold Separately

This is a device to absorb the surge generated by switching.



Table 18 Ratings.

Table To Hattings.								
Туре		CR-3	CR-6	CR-12	CR-15			
Applicable circuit voltage (kV)		3.3	6.6	12	15			
External dimensions	Α	150	200					
	В	237	337	=	-			
()	С	16	20					
Capacitance (µF)	pacitance (μF)		0.05×3 phases	0.1×3 phases	0.1×3 phases			
Resistance (Ω)		100×3 phases	100×3 phases	100×3 phases	100×3 phases			
Mass (kg)		8.5	10	31	33			
(mm) *1  Capacitance (μF)  Resistance (Ω)	-	16 0.05×3 phases 100×3 phases	20 0.05×3 phases 100×3 phases	100×3 phases	0.1×3 phases			

# Precautions

# (1) Caution for circuits containing harmonics

As is the case with general high-pressure capacitors, please exercise caution when applying CR suppressors to circuits with higher harmonic waves. Particular care is required regarding multiple-order harmonic waves which may have flowed into circuits used for current control via the thyristor. When using a CR suppressor, set the effective value of resultant current with harmonic waves to the values shown in the table below (values are 1.3 times the rated value).

Table 19 Effective value of resultant current with harmonic waves.

Туре	CR-3	CR-6	CR-12	CR-15
Acceptable values for the resultant	0.05A	0.1A	0.37A	0.37A
current of the harmonic wave	effective value / phase			

## (2) How to install

Install the CR suppressor vertically; do not install it horizontally or upside down.

# (3) Caution for regular inspections

Be sure to ground the secondary terminals of the CR suppressor before touching them.

# (4) Caution for withstand voltage tests

- 1.Please conduct a withstand voltage test after removing any wire connections.
- 2. Take care to ensure that test voltages and application times are correct. Depending on transformer capacity, excessive current flow may prohibit the test from being performed.


For withstand voltage tests where the panel includes a CR suppressor, the CR suppressor must be disconnected from main circuit.

Table 20 Acceptable test voltage of CR suppressor.

The second secon		•					
		Туре		CR-3	CR-6	CR-12	CR-15
		Between T-T	1 minute	6.6kV	13.2kV	24kV	30kV
Rated test voltage	AC	Between T-C	1 minute	7.6kV	14.2kV	28kV	36kV
		Between T-C	10 minutes	4.95kV	9.9kV	18kV	22.5kV

T: Terminal C: Case

# (5) Recommended replacement period: 15 years

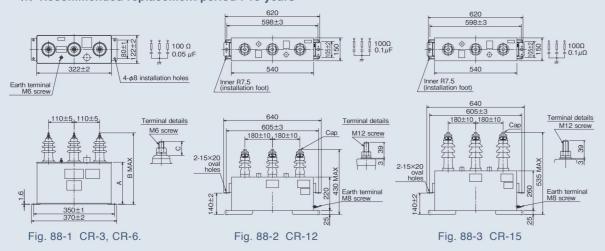

%1 Maximum height of the main-circuit terminal.

# ■ Arresters (for 3.6kV, 7.2kV) Sold Separately





Table 21 Ratings of Arrester

Brand name	Otowa G	L arrester						
Usage	Indoor							
Type name	GLI-3G	GLI-6G						
Rated voltage (kV)	4.2	8.4						
Applicable circuit voltage (kV)	3.3	6.6						
AC discharge starting voltage (kV crest)	6.3	12.6						
Impulse discharge starting voltage (kV peak)	17	33						
Official discharge current (A)	2500	2500						
Mass (kg)	1.	.5						

Disconnect wiring to perform withstand voltage test.

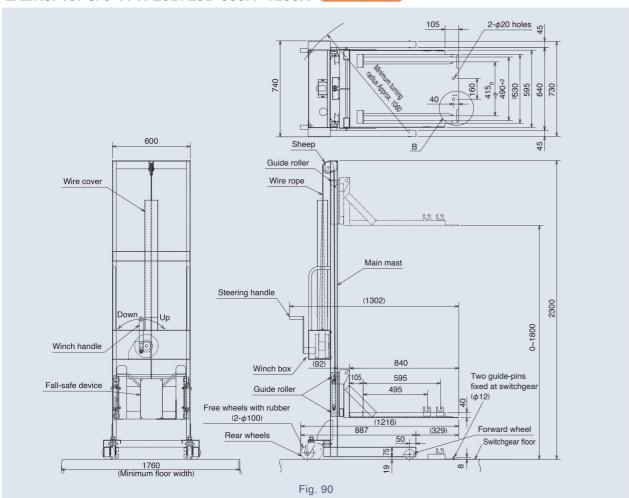

■ Lifter for 20-VPR-16D/25D 630A~1250A (Types C, D and G) Sold Separately


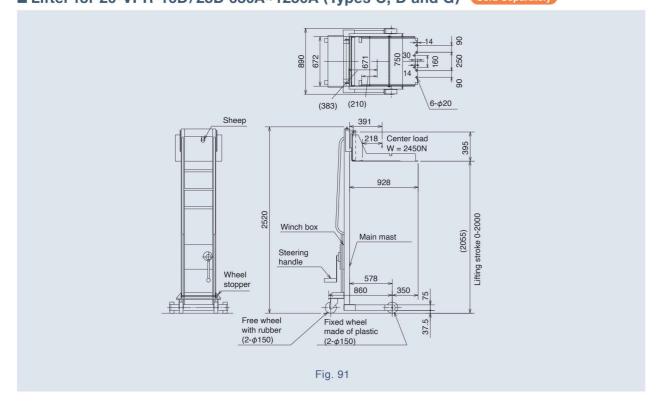


Fig. 92

Fixed wheel made of plastic( $2x\phi150$ )

■ Lifter (F-3C, F-3C + Adapter for Type-M : For 10-VPR-D) Sold Separately

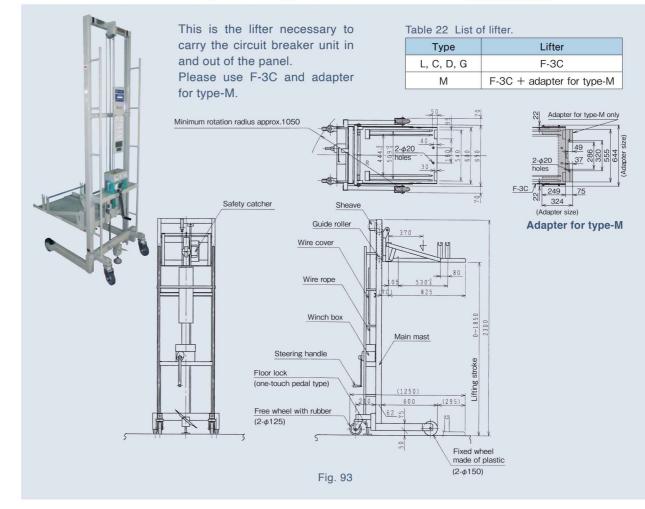

RELEVANT DEVICES

# 9 Relevant Devices (3)

# ■ Capacitor Tripping Device (CTD) Sold Separately

This device makes it possible to trip the circuit breaker electrically within a fixed time via remote control even when the control power is out.



14.3 2-M6
17 Mounting screws

4-M4
Terminal screw


Protective cow

Table 23 Ratings

Туре	Condenser C	Resistance R1	Resistance R2	Resistance R3
KF-100E	820μF	10W300Ω	10W100Ω	0.5W240kΩ
KF-200CD	820μF	10W300Ω	10W100Ω	0.5W240kΩ

Table 24 Table of ratings

Items	KF-100E	KF-200CD				
Rated working voltage (V)	100/110AC	200/220AC				
Rated frequency (Hz)	50,	/60				
Rated output voltage (V)	140/1	55DC				
Power consumption (steady state) (W)	0.1 or less					
Electric charge time constant	1	2.3				
VCB operational voltage (V)	100~	125DC				






Fig. 95 Circuit diagram (KF-100E).

Fig. 96 Circuit diagram (KF-200CD).

KF-200CD converts the input voltage of

⊢∖sw

DC+

DC-

52a

STC

R3

R2 LED

# Remarks

- 1. Capacitor tripping devices are mounted on the panel as standard.
- 2. Mounting fixtures that enable installation inside the panel are optional. The device can be installed facing the left, right, up or down according to the direction of the mounting fixtures.

## Caution:

- 1. Please note that the KF-200CD output voltage is 140/155VDC. It cannot be used to open circuit breakers with a tripping voltage of 200/220VDC and may cause an accident in this case.
- 2. Be sure to completely charge a capacitor before performing opening operation or giving the opening command.
- 3. The sole purpose of this device is tripping a VCB. Do not use for any other purpose.
- 4. One device is required per VCB unit.
- 5. Recommended replacement period: 6 years

# Interlocking Process for the Panel Door When Using Withdrawable with Door Closed (Type-M) Operation Mechanism

Through optional processing of the panel door, the VCB unit can be installed together with the following interlock function.


# Interlock function with panel door

# Function

VCB can only be moved when the panel door is in the closed state.

An insertion/draw-out handle (for type-M) can be used to move the VCB after closing the panel door with the unlocking pin attached to the door.


Unlocking pin must be installed



# Example of processing procedure


## ■ 10-VPR-D

- \*In this example, the distance between the inside of the panel door and edge of the mounting frame is 53mm.
- Install a  $\phi$ 5mm unlocking pin (figure below shows M5 screw) in the position shown in the figure below (dimensions: 117mm, 32.5mm).
- Use an unlocking pin with a length that enables it to be inserted in a position 11mm from the edge of the mounting

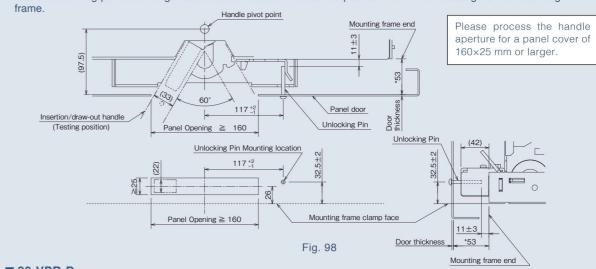

## ■ 20-VPR-D

- Install a φ6mm unlocking pin in the position shown in the figure below(demensitions 68mm,30.5mm).
- Use an unlocking pin with a length that enables to be inserted in a position 18mm from the edge of the VCB.

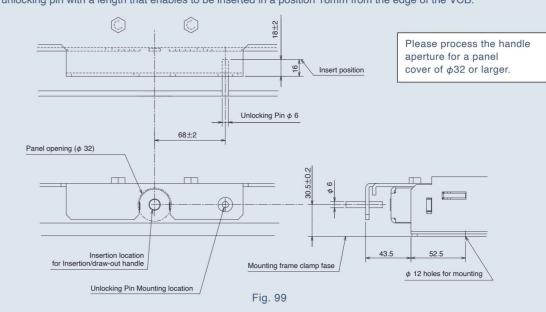

**TECHNICAL** 

INFORMATION



# **■** Operation Mechanism and Operating Principles

# Closing Operation

Fig. 100 shows the state where the circuit breaker is opened and the closing spring is discharged.

## ■ Electrical (Closing) Operation

- ①When the power supply is connected, auxiliary relay 52Y is excited via limit switch LS2 and the contact of auxiliary relay 52Y closes, which then activates the motor via LS2, and the contact of auxiliary relay 52Y starts to charge the closing spring. When the closing spring is completely charged, limit switch LS2 opens, the motor then stops and limit switch LS1 closes (the closed control circuit is formed).
- ②By closing the closing command switch CS1 in this state, the closing coil CC is excited, the closing latch of the operating mechanism is released and the circuit breaker closes as a result of the energy from the charged closed spring. Through discharging the closed spring, LS2 is closed and LS1 is opened.
- 3 When limit switch LS2 closes, the motor activates and charges the closing spring to prepare for the next closing (4) operation.

When the circuit breaker is closed, circuit breaker auxiliary contact 52b opens and shuts off excitation of closing coil CC. At the same time auxiliary contact 52a closes and forms a trip circuit of the shunt tripping coil STC and at the same time excites the auxiliary relay (for anti-pumping prevention) 52X

# When Closing Commands are Consecutively Given While Charging Closed Spring

If consecutive closing commands are given to the closing operation switch CS1 while charging the closed spring (charge time of motor: 10 seconds or less): limit switch LS1 closes, the closing coil CC is excited, and the circuit breaker closes after completing the charging of the closing spring.

# Tripping Operation

- 1 By closing the trip command switch CS2, the shunt tripping coil STC is excited, the engagement of the tripping latch at the operating mechanism is released and the circuit breaker opens
- When the circuit breaker is opened (tripped), circuit breaker auxiliary contact 52a opens and shuts off excitation of STC to prepare for the next closing operation.

## Trip-free Operation

If the closing command and trip command are given simultaneously when the circuit breaker is in an opened state and the closing spring is in a charged state (closing preparation):

- ①Operation takes place in the order of ②, ③, and ④ of the electrical (closing) operation. Then, because the trip command is being continued, operation ① of the electrical (trip) operation occurs.
- @ Electrical (closing) operation ① is returned but since the auxiliary relay 52X is continuously being excited, a closed circuit is not formed by contact 52Xb and the circuit remains in the opened state.
- 3 When performing the closing operation, it is necessary to release the closing command by closing command switch CS1 and then restore auxiliary relay 52X.

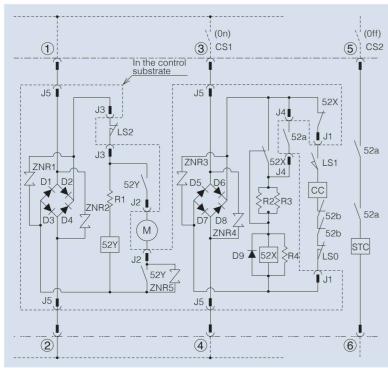


Fig. 100 Basic control circuit diagram.

The wiring diagram on the left indicates:

Circuit breaker : Opened state Closing spring : Discharged state Motor circuit : No-voltage condition

CS1 : Closing command switch CS2 : Thip command switch

: Motor (for charging closing spring)

: Closing coil

STC : Shunt tripping coil LS<sub>0</sub> : Limit switch

(for detecting VCB's position)

LS1 : Limit switch

: Limit switch (for starting/stopping motor)

(for detecting spring charge) 52a/b : Auxillarry contacts for circuit breaker

52Y : Auxiliary relay (for motors)

52X : Auxiliary relay (for pumping prevention)

(R3 and R4 are equipped only for 200/220V)

# ■ Operation/Control Voltage (Current)

Table 25 Variation range of operation/control voltage

Standard	JEC-2300	IEC-62271-100
DC	95~110 <sup>9</sup> /.**	85~110%
AC	65 - 110 %	85.9110%
DC	75~125%	85~110%
AC	85~110%	85~110%
DC	60-1059/	70~110%
AC	60~125%	85~110%
	DC AC DC AC DC	DC 85~110% <sup>®</sup> AC 75~125%  AC 85~110%  DC 60~125%

<sup>\*</sup>Due to electric spring operation

Table 26 Closing and tripping control current and current-flow time for DC and AC (see Fig.101)\*\*.

## **≪Closing control current≫**

	0					VAC										
	Control voltage (V)			24		48		100/110		25	200	/220	100/110		200	/220
	Current (A), Time (s)		1	Т	- 1	T	- 1	Т	- 1	Т	- 1	Т	T	Т	1	Т
	3/6-VPR-D		12	0.05	7	0.05	3.5	0.05	4.5	0.05	1.5	0.05	3.5	0.05	1.8	0.05
١,	10-VPR-D		12	0.05	7	0.05	3.5	0.05	4.5	0.05	1.5	0.05	4	0.05	1.8	0.05
V	10-VPR-50C (D)	Closina					3.2	0.08		-	1.5		3.2	0.08	1.8	0.05
p		3	12	0.05	7	0.05	4	0.05	4.5	0.05	1.5	0.05	4	0.05	1.8	0.05
е	20-VPR-25D (2500A)		12	0.05	7	0.05	4.5	0.05	5	0.05	1.5	0.05	4.5	0.05	1.8	0.05

Is: Maximum flowing current at the time of disconnection monitoring

## ≪Opening control current≫

	0 1 1 1 (11)			VDC													VAC																							
	Control voltage (V)			24 48 100/110 125 200/220				1	00/11	)	200/220																													
	Current (A), Time (s)		1	Т	Is	1	T	Is	1	T	Is	-1	Т	Is	-1	Т	Is	1	Т	Is	-1	Т	Is																	
	3/6-VPR-D		13	0.03	-	8	0.03	9	3.5	0.05	=	5	0.03	-	2	0.03	. 2	-	0.03	-	-	0.03	-																	
т	10-VPR-D		13	0.03	0.03	8	0.03	0.03	4	0.03	0.03	5	0.03	0.03	2	0.03	0.03	-	0.03	Ξ	16	0.03	-																	
у	10-VPR-50C (D)	Tripping	Tripping	Tripping	Tripping	Tripping	Tripping	Tripping	Tripping	Tripping			-				3.2	0.03			-		2	0.03	-	-	0.03	-	11-	0.03	-									
p e	10-VPR-25D (M)										11 3		11 3	11 3	11 3		ppg	ppg			mpping	mpping	mpping	Tripping	mpping	ppg			13	0.03		8	0.03	-	3.4	0.03		5	0.03	
	20-VPR-16D/25D		13	0.03	-	8	0.03	-	3.4	0.03	0.008	5	0.03	0.008	2	0.03	-	-	0.03	~	-	0.03	-																	
	20-VPR-25D (2500A)		13	0.03	-	8	0.03	-	3.4	0.03	-	5	0.03	-	2	0.03	- 1	-	0.03	-	-	0.03	-																	

Is: Maximum flowing current at the time of disconnection monitoring

Table 27 Motor operation control current and current-flow time for DC and AC (see Fig.102).

VDC										VAC																			
	Control voltage (V)		2	4			4	8			100	/110			12	25		2	200/2	220			100/	110		1	200/2	220	
	Current (A), Time (s)	I <sub>1</sub>	l <sub>2</sub>	T <sub>1</sub>	T <sub>2</sub>	I <sub>1</sub>	l <sub>2</sub>	T <sub>1</sub>	T <sub>2</sub>	Ιį	I <sub>2</sub>	T <sub>1</sub>	T <sub>2</sub>	Ιį	l <sub>2</sub>	T <sub>1</sub>	T <sub>2</sub>	l <sub>1</sub>	l <sub>2</sub>	T <sub>1</sub>	T <sub>2</sub>	I <sub>1</sub>	l <sub>2</sub>	T <sub>1</sub>	T <sub>2</sub>	I <sub>1</sub>	12	T <sub>1</sub>	T <sub>2</sub>
	3/6-VPR-D	12	3.5	0.1	8	8	1.5	0.1	8	4	0.8	0.1	8	5	1	0.1	8	2	0.5	0.1	8	5.5	2	0.1	8	2.5	1.3	0.1	8
Т	10/15-VPR-25D/32D/40D	18	6.5	0.1	6	12	2.5	0.1	6	6	1.2	0.1	6	7.5	1.5	0.1	6	3.5	0.6	0.1	6	8.5	3	0.1	6	4.5	1.5	0.1	6
у	10-VPR-50C (D)					-				6	1.5	0.1	10	7.5	1.9	10	6		0.6	0.1	6	11.5	6	0.1	6	4.5	1.5	0.1	6
e	20-VPR-16D/25D, 10-VPR-25D (M)	12	3.5	0.1	8	8	1.5	0.1	8	4	0.8	0.1	8	5	1	0.1	8	2	0.5	0.1	8	4	0.8	0.1	8	2.5	1.3	0.1	8
	20-VPR-25D (2500A)	18	6.5	0.1	6	12	2.5	0.1	6	6	1.2	0.1	6	7.5	1.5	0.1	6	3.5	0.6	0.1	6	6	1.2	0.1	6	4.5	1.5	0.1	6

# ■ Operation/Control Current Waveform for DC.




Fig. 101 Closing / tripping control current waveform.

## ■ Operation/Control Voltage (Current)

Table 28 Burden VA of closing coil and electrifying time for AC operation.

Control voltage (V)	10	00/110AC
Туре	Burdern (VA)	Time (s)
3/6-VPR-D	350	0.05
Model name other than above	680	0.05




Fig. 102 Motor operation current waveform.

Table 29 Motor burden VA and drive time for AC operation.

Control voltage (V)	10	00/110AC
Туре	Burdern (VA)	Time (s)
3/6-VPR-D	120	8
Model name other than above	180	6

When VCB and fault indicator are combined, please perform operation check of VCB and fault indicator.

Table 30 Table of auxiliary switch ratings.

Ratings a	and specifications		Туре	10/15-VPR-25D/32D/40D 10-VPR-50C(D) 20-VPR-25D 2500A
	Rat	ed insulation voltage	250 AC/DC	
	Ra	ted working voltage	(V)	220 AC/DC
			100~125V AC	5 (power factor 0.3~0.4)
		AC	200~220V AC	4 (power factor 0.3~0.4)
	Rated operational current (A)		24~55V DC	6 (time constant 40ms)
Standard contact		DC	100~110V DC	3 (time constant 40ms)
			200~220V DC	1 (time constant 40ms)
	Minimum		100V AC / V DC	30
	operational current (mA)	AC/DC	24V AC / V DC	50
	Rate	ed continuous current	t (A)	5
	Rate	ed operational voltage	e (V)	125 AC/DC
For micro	Rated operational current	AC ratings	100~125V AC	1~500
current	(mA)	DC ratings	24~125V DC	1~500
	Rate	ed continuous current	t (A)	0.5

Table 31 Table of auxiliary switch ratings.

Table of Table of advinary ewiter ratings.							
Ratings a	and specifications		3/6-VPR-D 20-VPR-16D/25D (630~2000A) 10-VPR-25D(M)				
	Rat	ed insulation voltage	(V)	250 AC/DC			
	Ra	ted working voltage	(V)	220 AC/DC			
			100~125V AC	5 (power factor 0.3~0.4)			
		AC	200~220V AC	5 (power factor 0.3~0.4)			
	Rated operational current (A)	DC	24~55V DC	5 (time constant 40ms)			
Standard contact			100~110V DC	1 (time constant 40ms)			
Contact			200~220V DC	0.5 (time constant 40ms)			
	Minimum		100V AC / V DC	30			
	operational current (mA)	AC/DC	24V AC / V DC	50			
	Rate	ed continuous current	5				
	Rate	ed operational voltage	e (V)	220 AC/DC			
For micro	Rated	AC ratings	100~125V AC	1~200			
current	operational current (mA)	DC ratings	24~125V DC	1~200			
	Rate	ed continuous current	t (A)	2			

# Classification as for Mechanical Endurance (M1 and M2)

The IEC standards broadly divide the mechanical operating test into classes M1 and M2. At the control voltages shown in Fig.103, class M1 requires the rated operation sequence to be performed 2000 times in total while class M2 requires the rated operation sequence to be performed 10000 times in total. At five times the actuating cycle of class M1, class M2 represents a highly reliable operation class.

Table 32 M1 and M2 operating sequence.

0	Control	Actuatir	ng cycle		
Sequence	voltage	M1	M2		
C-O	85%	500	2500		
C-O	100%	500	2500		
C-O	110%	500	2500		
O-C-O	100%	250	1250		





Fig.103

# Classification as for Electrical Endurance (E1 and E2)

Electrical endurance test that is specified in the IEC standards is broadly divided into classes E1 and E2. Class E2 has a longer breaking times than class E1, and is a highly reliable class due to huge energy arcs.

Table 33 E1 and E2 operating sequence.

Testing current (percentage of	Operating	Number of oper	rating sequence		
rated short-circuit breaking current)	sequence	E1	E2 <sup>(*)</sup>		
10%	0-C0-C0	1	1		
30%	0-00-00	1	1		
60%	0	_	15		
00 /8	O-CO-CO	1	15		
100% (symmetry)	O-CO-CO	1	2		
100% (asymmetry)	0-0-0	1	_		



Class E2 contains the number of breaking test of class E1.

Fig.104

# Probability of Restrike during Capacitive Current Switching (C1 and C2)

Performance in capacitive current swiching test is broadly divided into classes C1 and C2; class C2 is highly reliable.

- Class C1: Low probability of arc restrike at the time of capacitive current switching test (2 restrikes are allowed during O 24 operations and CO 24 operations).
- Class C2: Very low probability of arc restrike at the time of capacitive current switching test (Restrikes is not allowed during O 24 operations and CO 24 operations).
- %Arc restrike is the phenomenon that occurs when current flows later than a 1/4 of a cycle after zero when there are insufficiencies in the VCB arc extinction or in insulation stress between VCB poles for recovery voltage.

**57** 

58

# 12 Applicable Standards (1)

# ■ Operating Environment and Application

## Operating Environment

VPR series are designed and manufactured as an indoor unit and comply with JEC-2300 (AC circuit breakers) and IEC 62271-100. Accordingly, these VCBs require a normal service conditions specified in Table 34. Furthermore, sufficient maintenance and inspections must be performed in accordance with the VCB instruction manual. Please consult the manufacturer regarding operation of VCBs under special conditions

# Caution for Installation Site and Surrounding Environment

The VCB service conditions must comply with the specifications shown in Table 34. Do not use the VCBs in environments that do not meet these conditions. For use in outdoor panels and special environments where there is excessive dust, corrosive gas, water/condensation or abnormal vibration/shock, be sure to take appropriate countermeasures. Non-adherence to these cautions may result in damage to the products or degraded performance in areas such as switching, current carrying capacity and insulation.

1	Ambient temperature	$\text{-}5^{\circ}\text{C}$ - 40°C (The average temperature for 24 hours must not exceed 35°C.)			
2	Influence of solar radiation	There must be no influence of solar radiation.			
3	Altitude	1,000m or lower			
4 Powder dust There must be no excessive powder (As a guideline, the powder dust sho 2mg/m³ or less.)					
5	Relative humidity: 45 – 85% (There must be no dew condensation.)				
6	Vibration	There must be no excessive vibration.			
7	7 Degree of pollution (As a guideline, the equivalent salt deposit density should be less than 0.01mg/cm².)				

8 Poisonous gas | There must be no corrosive gas

Table 34 Normal service conditions

# ■ Application of Surge Protection Device

Table 35 outlines surge protection standards for the load circuit. Please use this table as a reference when selecting VCB types for actual applications.

## Surge Protection Standards

Table 35

Load device	Generator	Motor *3	Dry transformer	Oil transformer	Mitsubishi Electric molded transformer	Phase-advanced capacitor	
3/6-VPR-D (General purpose product)	CR suppressor used		General purpose *1 arrester used	Not required <sup>※1,4</sup>	Not required <sup>⊕2,4</sup>	Not required	
3/6-VPR-D (Low-surge product)		Not required ∞4					
Other than the above CR suppressor used		General purpose *1 arrester used	Not required *1	General-purpose *2 arrester used	Not required		

- \*11 To directly switch the semiconductor rectifier unit (for example, a electric power thyristor rectifier unit) to the secondary side of a transformer, use a transformer with a contact-protective plate. Use a general-purpose arrester on the primary side and the surge protective device (such as a filter capacitor) on the secondary side.
- \*2 Avoid interrupting the no-load excitation inrush current of a molded transformer oil transformer. When such current must be interrupted, use a general-purpose arrester. Before using any oil transformer or molded transformer made by other manufacturers, consult the manufacturer.
- \*3 For motors in applications where inching operation is frequently performed and inching is the predominant switching duty (cranes,
- \*4 Mitsubishi molded transformer and oil transformer are for 6kV with the impulse withstand voltage 60kV and for 3kV with the impulse

## Surge Voltage for Breaking Current

Surge voltage at the time of interrupting current generally includes the current chopping surge when interrupting an inductive small current. If small current is interrupted by a switch that is superior in arc extinction capacity like the vacuum circuit breaker, the arc suddenly dissipates before forcing the current to zero and then interrupts current. This is called the current chopping phenomenon, and a high surge voltage may be generated if the phenomenon occurs at the time of inductive small current breaking.

It is possible to calculate the current chopping surge voltage by the following general equations.

Circuit conditions	Surge voltage equation
(1) Without reverse voltage (inching switching of transformer circuit/motor)	$Es = \sqrt{E^2 + (\eta \times \sqrt{Lm / Cm} \times Ic)^2}$
(2) With reverse voltage (motor switching of the constant - velocity drive)	$Es = E + \eta \times \sqrt{Lm/Cm} \times Ic$

Es: Surge voltage (peak value)

E: Power voltage to ground (peak value)

 $\eta$ : Attenuation coefficient (for transformer: approx. 0.65, for motor: 0.85)

 $\sqrt{Lm/Cm}$ : Surge impedance

Lm: Inductance of load circuit including a transformer or motor

Cm: Earth capacity of load circuit including a transformer or motor

Ic: Chopping current

# Application to the Capacitor Circuit

Although a capacitor circuit can be used, please exercise caution in regard to the following:

Before re-closing the capacitor, make sure the capacitor is fully discharged to prevent the risk of overvoltage being generated.

# Application to the Different System Butt Welding Circuit (Excluding 20-VPR-D 630/1250A)

Application to different-system circuits

Application to different-system circuits is possible. In this case, it is necessary to shorten the maintenance, inspection and cleaning cycle because the voltage added between VCB poles will be higher than under normal conditions. A more frequent maintenance and inspection cycle is especially important in environments where there is pollution or high humidity.


## Caution for Korndorfer Start Circuit

For a korndorfer start, a neutral point release of the auto-transformer should be conducted after the start current is


Alternatively, for an auto-transformer that is used as a starting compensator, please use a korndorfer system startup transformer specified in "power transformer (JEC-2201)."

# Application to Electric Furnace Circuit (Excluding 10-VPR-50C(D), 20-VPR-D)

High frequency switching of the circuit breaker for an electric furnace increases the possibility of generating a switching surge, and when a filter capacitor is connected there is a risk of generating high overvoltage. In addition to adopting a surge protection device, please use a circuit breaker with a high withholding voltage or select a circuit breaker with a rated voltage in one of the top classes.

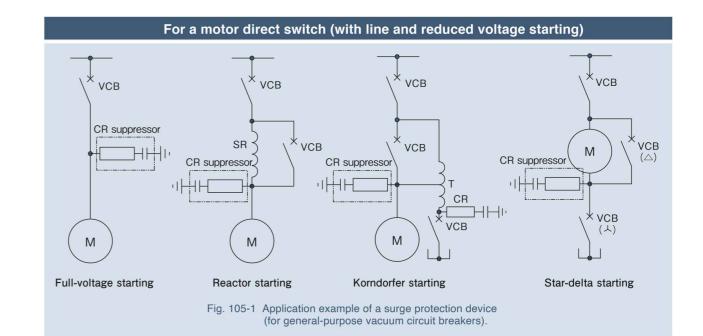

# 12 Applicable Standards (2)

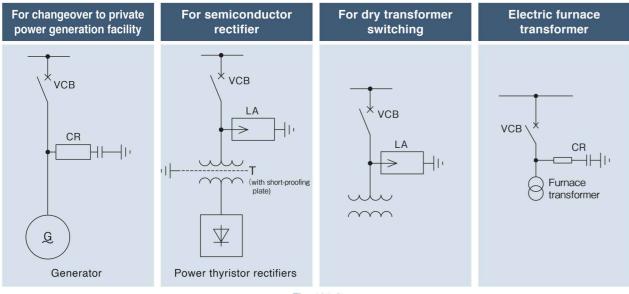

# **Service Life and Applications**

The service life of VCBs is specified in terms of the vacuum service life of VI, as well as the electrical and the mechanical service lives.

# Vacuum Service Life of VI

The high vacuum of the VI in the VCB ensures interrupting and insulation characteristics. It is very important that this vacuum be

Our VIs are manufactured on our advanced production line and provide safe, long term use guaranteed by our original method of service life testing and control. Vacuums can be inspected simply as part of regular inspections via the withstand voltage method or through use of portable vacuum checkers.

# ● Electrical Service Life of VI (see Table 36)

The electrical service life of a VI is determined by the electrode consumption and the number of switchings. For VPR-D, the service life can be determined by the number of load switchings, because the electrode consumption is extremely small. Therefore, it is not required to measure the electrode consumption (wipe) at the time of maintenance and inspection.

# Mechanical Service Life

This can be determined by the operation counter provided in the VCB (provided in all types as standard specification).

## Replace When Service Life Expires

The estimated service life is 20 years when used under normal environmental conditions. When the VCB reaches the end of its mechanical service life or its specified operation count, it is necessary to replace the VCB.

Table 36 Switching service lives.

**APPLICABLE** 

**STANDARDS** 

Type	Load switching service life (times)	Mechanical switching service life (times)
VPR series	10000	10000

<sup>\*\*</sup> Values shown in the table above are based on the continuous switching test and apply to the short term; they are not guaranteed in the long term. To ensure optimum performance, please follow the maintenance and inspection procedures described in the instruction manual.

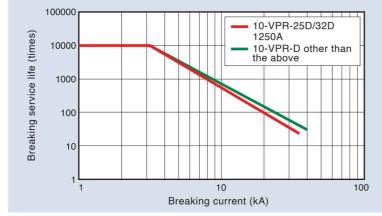


Fig. 106 Breaking service life criterion for breaking current.(10-VPR-D)

Table 37 Capacitor load applicable capacities.

Items Type	Maximum switching capacity (kVar)	Multiple switching capacity (kVar)	
3-VPR-20D/25D	2500	1500	
6-VPR-20D/25D	5000	3000	
10/15-VPR-D	7000	4000	
20-VPR-16D	20-VPR-16D 12000		
20-VPR-25D	20-VPR-25D 17000		

[Notes] • Electrical service life for the max. switching capacity is approx 2000 times; multiple switching capacity is 10000 times. Applicable capacities with 6-13% series-connected reactor.




Fig. 107 Guidelines on the switching times for applicable capacity (for 12, 15kV).

Table 38 Maximum applicable capacity.

Items	Three-phase induction motor							Distribution transformer (kVA)			4)			
	Full-lo	ad curren	ıt (A) <sup>⊛1</sup>			Motor	output (I	kW) <sup>≋2</sup>			istribution	II ti ai i si oi	iller (KVA	<b>(</b> )
Туре	3.3kV 6.6kV	11kV	13.8kV	22kV	3.3kV	6.6kV	11kV	13.8kV	22kV	3.3kV	6.6kV	11kV	13.8kV	22kV
3/6-VPR-20D/25D(630A)	630		-		2450	4900		-		3500	7000		-	
3/6-VPR-20D/25D (1250A)	1250		-		4900	9800	-			7000	000 14000 -		-	
10-VPR-25D(M) (600/630A))	630		-	-	-	-	-			7000	14000	23000	1-	
10-VPR-25D(M) (1200/1250A)	1250				-	6	3	-		7000	14000	23000	-	
10/15-VPR-D (600/630A, 1200/1250A)	12	250		-	4900	9800	16100	20300	-	7000	14000	23000	29000	-
10/15-VPR-D (1600A, 2000A)	20	000		-	7700	15400	26600	32900	15	11000	22000	38000	47000	-
10-VPR-D (3000/3150A)	31	50		-	12600	25200	42000	52500	4	18000	36000	60000	75000	-
10-VPR-50C(D)	-	4000		-		×.	53200	-		2.		76000	-	-
20-VPR-16D/25D (600/630A)		-		630	-			16800			-		24000	
20-VPR-16D/25D (1200/1250A)	•			1250	-		32900		-					
20-VPR-25D (2000A)	-			2000	-		-		53200			-		76000
20-VPR-25D (2500A)				2500		3			66500			-		95000

- %1 Maximum applicable full-load current (A) is for a single breaker.
- ※2 Motor output (kW) is: calculated by power factor x efficiency=0.7.

# **Polarity in Connecting to Main Circuit**

It is unnecessary to classify the polarity in the power/load sides when connecting the main circuit of the VCB. (Electrical or mechanical performance is not changed regardless of whether it is connected to the power side of load side.)

The contact resistance and calorific value of each rated current are shown. Use this as a reference when selecting models. Table 39 Contact resistance and calorific value of each rated current

Type	Rated current (A)	Contact resistance $\mathrm{Rc}(\mu\Omega)$ between ① and ② <sup>361</sup>	Calorific value (W) / three phases		
0/0 VDD 00D/05D	630	82	99		
3/6-VPR-20D/25D	1250	60	328		
0/0 \/DD 00D0/05D0	630	88	105		
3/6-VPR-20DG/25DG	1250	73	342		
10-VPR-25D(M)	600/630	106	126		
10-VFH-25D(IVI)	1200/1250	79	370		
10-VPR-25D/32D 600/630 1200/1250		72	338**2		
15-VPR-32D 10/15-VPR-40D			296*2		
10/15-VPR-D	1600/2000	42	504		
10-VPR-D	3000/3150	24	715		
20-VPR-16D	600/630	88	105		
20-VPR-25D	600/630	99	118		
20-VPR-16D	1200/1250	65	305		
20-VPR-25D	1200/1250	62	291		
20-VPR-25D	2000	39	468		
20-VPR-25D	2500	38	600		
10-VPR-50C(D)	4000	33	1584		



%2 Value at the time of applying a 1250A electrical current.





Fig. 108

# 12 Applicable Standards (3)

# **■ Lifting the VCB**


Lift the VCB using the mounting holes as shown below.

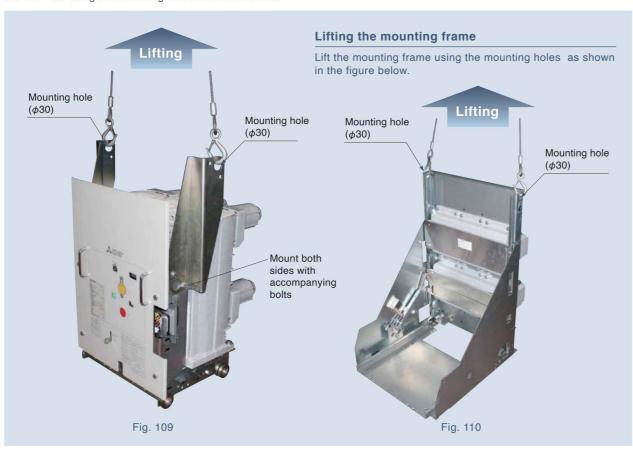

Do not lift VCBs while they are inserted in the mounting frame. When lifting the VCB or mounting frame, please refer to the instruction manual and follow the specific conditions provided.

# ■ Shipping Clamps (10-VPR-D)

When a switchgear is supplied with the mounting frame and VCB (in test position), it is necessary to mount the frame and VCB on the switchgear. Follow the directions in the instruction manual and the accessories section of this catalog (page 38) to mount the devices using screws (M10) in the positions shown in the figure.

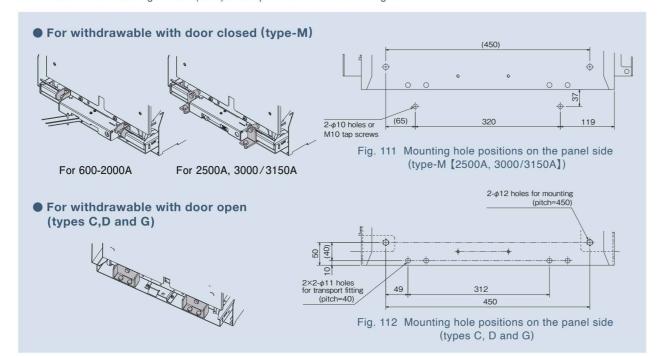

# ■ Altitude

When using the VCB in altitudes over 1,000m above sea level, the insulation withstand level is reduced due to differences from the standard ambient conditions.

To make corrections for altitude, please confirm and apply the insulation withstand levels for higher altitudes as listed in IEC 62271-1-2011.

For installations at an altitude 2500 m, if VCB is required with BIL 75kV, VCB with BIL 95kV should be used in accordance with Figure 113. "75 multiplied by 1.2 is 90."




Fig. 113

■ Recommendations for VCB Maintenance

# 1.Standards for the replacement of parts

Replace parts according to the following schedule (applies to all types) to ensure reliable operation for the full term of the service life (20 years).

Table 40 Standards for the replacement of parts.

	D	Replacement stan	Reason for replacement		
Part		Actuating cycle			Usage period
Dumper		5000	6 years	Degradation over time	
Auxiliary switch		5000			
Motor		5000	10-15 years	Preventive maintenance	
Limit switch		5000	youro		
Switching service life of the rated short-circuit breaking current		10 times*	_	Electrical service life	
Insulation performance		When defects occur in vacuum and	Degradation		

<sup>※ 10-</sup>VPR-D is 30 times.

# 2. Types of inspections

Table 41 Maintenance and inspection cycle

Table 41 Maintenance and inspection cycle.						
	Maintenance and inspection cycle					
Maintenance and inspection classification	Normal environment	Substandard environment (especially dew condensation, salt and powder dust)				
Patrol inspection	6 months	1 month				
Periodic inspection	First time: 1-2 years Second time and later: 3 years	1-2 years				
Detailed inspection	6 years	2-4 years				
Special inspection	Maintenance and inspection cycle					

Caution ● Please replace a VCB when the number of switching operations reaches 10000 times.

## 3.VCB Replacement Condition

VCBs are recommended for replacement when any of the following conditions are true:

- 1. Twenty years have passed since manufacture.
- 2. Switching service life has expired (see page 61).
- 3. Abnormalities are identified in the inspection described in Table 41 and there is no chance of restoring the abnormalities through repair of parts.
- Make sure to refer to the instruction manual before inspection.

<sup>•</sup> Please consider replacing the product after 20 years of use under normal environmental conditions.

# 13 Ordering Information (1)

	Standard	Table 42	2 3/6-VPR-2	20/25	D									
	1 2	3(4)(5)	6 7	8	9	10	11)	12 (13)	14)	(15)	16	17	18)	19
_		VPR		D										
Specifications	Rated voltage	Туре	Rated short-circuit Breaking current	Series name	Classification	*1 Standards	Mounting configuration	Rated current	Closing operation /control voltage	Tripping control voltage	Position switch	Secondary	Auxiliary switch	Closing spring charge indication switch
	<b>0 3</b> 3.6kV	VPR	2 0 20kA	D	Standard	IEC 62271- 100(2008)	Withdrawable with dooe open (type-C) and class CW	0 6 630A	100~125 VAC/VDC	100~125 VDC	×	CodeA (Without interlock)	Standard (5a5b)	×
	<b>0 6</b> 7.2kV		2 5 25kA		G Low surge		Withdrawable with dooe open (type-D) and class PW	1 2 1250A	200/220 VAC/VDC	2 200/220 VDC	1 unit Connected position 1C+ Test position 1C	CodeB (With interlock)	For microurrent Standard 3a3b contact For microcurrent 2a2b contact	Mith 1C
Codes and descriptions							Fixed (type-L)		7 24VDC	7 24VDC	2 unit ( Connected position 2C+ Test position 2C)			
Codes and									<b>8</b> 48VDC	8 48VDC				
										100/110 VAC with CTD				
										200/220 VAC with CTD				

 $<sup>\</sup>frak{1}$  The application standard of 3/6-VPR-20D/25D is only IEC.

	Stand	dard	Table	43 10	VPR-	25D(M)											
	1 (	2) (	3(4)(5)	6 (	7) (8	9	10	11)	12 13	14)	15	16	17	18	19	20	21)
	1 (	ר כ	<b>VPR</b>	2 !	5 D	M	П			П	П		П	П	П	П	П
	. 🖳		<del>'</del>				<u> </u>			H		닏		<u> </u>	닏	<u> </u>	ш
Specifications	Rate voltaç	-	Туре	Rated short-cir Breakin currer	cuit Seri		Standards	Mounting configuration	Rated current	Closing operation /control voltage	Tripping control voltage	Position switch	Secondary connector	Auxiliary switch	Closing spring charge indication switch	Mounting frame	Optional accessories
	1 (1 12kV	_	VPR	2 E		Class E1	JEC 2300 (2010)	Withdrawable with dooe open (type-C) and class CW	0 6 600/630A	100~125 VAC/VDC	100~125 VDC	O ×	CodeA (Without interlock)	Standard (5a5b)	×	With mounting frame	<b>0</b> ×
lescriptions							IEC 62271- 100(2012)	Withdrawable with dooe open (type-D) and class PW	1200/1250A	200/220 VAC/VDC	2 200/220 VDC	1 unit Connected position 1C+ Test position 1C	CodeB With interlock	For micrcurrent / Standard 3a3b contact For microcurrent 2a2b contact	With 1C	Without mounting frame	With optional accessories
Codes and descriptions	5							Withdrawable with dooe open (type-G) and class MW		<b>7</b> 24VDC	7 24VDC	1 unit Connected position 2C+ Test position 2C					
										8 48VDC	8 48VDC						

0	ptional Acces	sories Table	44 10-VPR-2	5D(M) (specia	al specification	s)
Specifications	Draw-out mechanism padlock device (P)	Padlock device for close and trip button (B)	Capacitor tripping device (1), (2)	Earthing switch (Class E2) (1), (2)	Optional terminal (V:Vertical, H:Horizontal)	Shutter padlock device (S)
Codes and descriptions	P	В	1	With electrical interlock	V	S
Sodes and			2	Without electrical interlock	H	

Caution • When selectiong BIL95kV, withdrawable with door closed (type-M), Fixed (type-L), mechanical locking device, tripping coil disconnection monitoring, additional auxiliary switch(additional 5a5b), additional shunt tripping coil and short-circuit capacity earthing, select 10-VPR-D.

# Example for Order No.

10VPR25DMID12110B0000 (without optional accessores)

10VPR25DMID12110B000APB (with mechanical locking device and padlock device for close and trip button)

=	_	į
ď		
	Ŧ	
	4	J
C	r	1
3	=	9
-	т	7
F	•	ø
Ξ	7	3
5	_	
5		
		3
_		1
	=	ī
		i
ı	=	۹
ø	_	d
Ē		
d	⋖	_
-	Т	ī

	Standard	Table	e 45 10/15	-VPF	R-D											
	1 2	3(4)(5)	6 7	8	9	10	11)	12 13	14)	15)	16)	17)	18)	19	20	21)
	$\neg \Box$	<b>VPR</b>		ח						$\Box$	П	П		П		
Į	ᆛᅛᆛ	VEN	ᆛᆛ	י	Ļ	البا	البا		Щ	Щ	H	Щ	H	Н	Щ	H
Specifications	Rated voltage	Туре	Rated short-circuit Breaking current	Series name	:	**5 Standards	*2,3 Mounting configuration	Rated current	Closing operation /control voltage	Tripping control voltage	Position switch	Secondary connector	Auxiliary switch	Closing spring charge indication switch	Mounting frame	Optional accessories
	<b>0 3</b> 3.6kV	VPR	2 5 25kA	D	Class E1	JEC 2300(2010)	Withdrawable with door closed (type-M) and class MW	0 6 600A/630A	100~125 VAC/VDC	100~125 VDC	×	CodeA (Without interlock)	Standard (5a5b)	O <sub>×</sub>	With mounting frame	<b>0</b> ×
	<b>0 6</b> 7.2kV		3 2 31.5kA		Class E2	IEC 62271- 100(2012)	Withdrawable with door opened (type-C) and class CW	1200/1250A	200/220 VAC/VDC	200/220 VDC	1 unit Connected position 2C+ Test position 2C	CodeB (Without interlock)	For microurrent /Standard 3a3b contact For microcurrent 2a2b contact	With 1C	Without mounting frame	With Optional accessories
	1 0 12kV		40kA		Class E1 BIL95kV (12kV)		Withdrawable with door opened (type-D) and class PW	1600A	7 24VDC	7 24VDC	1 unit Connected position 4C+ Test position 2C					
Codes and descriptions	15kV (Except for the fixed (type-L)				Class E1 BIL95kV (12kV)		Withdrawable with door opened (type-G) and class MW	2000A	<b>8</b> 48VDC	<b>8</b> 48VDC						
Codes and							Fixed (type-L) (Except for 15kV)	2500A (Except for 15kV)	1 1 is st 2 2, 7 and 7 will be r upon re	andard.  d 8 manufactured eceipt of order						
								3000A/3150A (Except for 15kV)	O							

- ※1 Rated short-circuit breaking current of 40kA with E2 class cannot be manufactured.
- \*\*2 Withdrawable with door closed (type-M) is not compatible with mounting configuration class CW.
  \*\*3 Fixed (type-L) is not compatible with the rated voltage 15kV, BIL95kV, and code B.
- \*\*4 When selecting withdrawable (type-M), additional auxiliary switch and additional shunt tripping coil, the control circuit plug configuration of code B should be applied. \*\*5 When selecting JEC 2300-2010 for standard, select class E1 for classification \*\*9

- Caution See 3/6-VPR-20/25D of Table 42 for the following specifications.
  - Rated voltage : 7.2kV or less
     Rated short-circuit Breaking current : 25kA
  - · Class E1
  - Mounting configuration : Type-C,D,G or L
  - · Rated current : 1250A or less

0	ptional Acc	essories	Table 46 C	ode descrip	tion chart (	special spe	cifications)	]			
Specifications	Mechanical locking device (K)	Tripping coil disconnection monitoring (T)	Additional auxiliary switch (additional 5a5b) (A)	Additional shunt tripping coil (D)	Draw-out mechanism padlock device (P)	padlock device for close and trip button (B)	*3,5 Capacitor tripping device (1), (2)	Earthing switch (Class E2) (E), (F)	Short-circuit capacity earthing (J)	Optional terminal (V: Vertical, H: Horizontal)	Shutter padlock device (S)
Codes and descriptions	K	T	A	D	P	В	For 100/110V AC	With electrical interlock	J	V	S
Codes ar							For 200/220V AC	Without electrical interlock		Н	

- \*\*2 Earthing switches are not compatible with type-C in the mounting configuration.
   \*\*3 When the tripping power is AC and the capacitor tripping device (CTD) is selected, select 100 125V for the tripping control voltage<sup>®</sup>.
- \*\*4 When selecting an additional auxiliary switch, draw-out mechanism padlock device and additional shunt tripping coil, it will be compatible only for control circuit plug: code B. \*\*5 The tripping coil disconnection monitoring and the capacitor tripping device should not be used together.
- \*6 The fixed (type-L) is not compatible with earthing switches, short-circuit capacity earthing, optional terminals or shutter padlock device.

# Example for Order No.

10VPR40D1ID12110B0000 (without optional accessories)

 $10 VPR40D1ID12110B000 \underline{AKD} \text{ (with mechanical locking device and additional shunt tripping coil)}$ 


To order any of the products below (sold separately), please contact a local service rep

☐ Lifter ☐ CR suppressor ☐ Vacuum checker

13

**ORDERING** 

INFORMATION

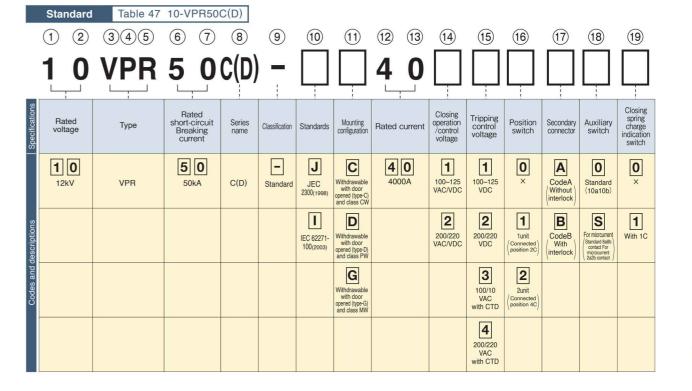

13

Standard Table 48 20-VPR-D	13 0	)rdei	ring Ir	for	ma	tic	n	(3	)			
	Standard	Table 48	20-VPR-D									
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18	1 2 3	456	7 8 9	10	(11)	12	13	14)	15)	16)	17)	(18

(	1 2	3(4)(5)	6 7	8	9	10	11)	12 (13)	14)	15)	16	17	18	19	20	21)
	20	VPR[		D	1											
Specifications	Rated voltage	Туре	Rated short-circuit Breaking current	Series name	Classification	#6,7 Standards	#1 Mounting configuration	Rated current	Closing operation /control voltage	Tripping control voltage	*2,3,4,5 Position switch	Secondary connector	Auxiliary switch	Closing spring charge indication switch	Mounting frame	Optional accessories
_	<b>2 0</b> 24kV	VPR	16kA Except for 2000A rated current	D	Class E1 New optional functions	IEC 62271- 100	Withdrawable with door closed (type-M) and class MW	<b>0 6</b> 630A	100~125 VAC/VDC	100~125 VDC	×	CodeA (Without interlock)	Standard (5a5b)	×	With mounting frame	×
			2 5 25kA				Withdrawable with door open (type-C) and class CW	1 2 1250A	200/220 VAC/VDC	2 200/220 VDC	1 unit (Connected position 2C)	CodeB With interlock	For microurrent (Standard 3a3b contact For microcurrent 2a2b contact)	With 1C	Without mounting frame	With Optional accessories
Codes and descriptions							Withdrawable with door open (type-D) and class PW	2000A (Except for)	7 24VDC	7 24VDC	2unit (Connected position 4C)					
Codes and							Withdrawable with door open (type-G) and class MW		<b>8</b> 48VDC	<b>8</b> 48VDC						
									1 1 is sta 2 2, 7 and 7 will be n	andard.  18 nanufactured ceipt of order						
									8 upon re	ocipi di didei						

- \*\*1 Withdrawable with door closed (type-M) is not available with mounting configuration class CW.
  \*\*2 In the case of position switch code 1, withdrawable with door open (types-C,D and G) is connected position 2C.
  \*\*3 In the case of position switch code 1, withdrawable with door closed (type-M) is connected position 2C + test position 2C.
  \*\*4 In the case of position switch code 2, withdrawable with door open (types-C,D and G) is connected position 4C.
  \*\*5 Withdrawable with door closed (type-M) is not available with position switch code 2.
  \*\*6 Rated currents of 630A and 1250A are IEC62271-100 (2012).
  \*\*6 Rated current 2000A is IEC62371 (2012).

- %7 Rated current of 2000A is IEC62271-100 (2017).

0	ptional Acces	sories Table	49 20-VPR-D			
Specifications	Tripping coil disconnection monitoring (T)	Draw-out mechanism padlock device (P)	padlock device for close and trip button (B)	*2,3 Capacitor tripping device (1), (2)	Earthing switch (Class E2) (E), (F)	*5,6 Optional terminal (V)
Codes and descriptions	T	P	В	1 For 100/110V AC	With electrical interlock	Terminal for vertical connecting
Codes and				2 For 200/220V AC	Without electrical interlock	

- \*\*1 Earthing switches are not available with type-C in the mounting configuration.
  \*\*2 When the tripping power is AC and the capacitor tripping device (CTD) is selected, select 100 125V for the tripping control voltage<sup>(§)</sup>.
  \*\*3 The tripping coil disconnection monitoring and the capacitor tripping device should not be used together.
  \*\*4 Withdrawable with door closed (type-M) is not available with Draw-out mechanism padlock device.
  \*\*5 Code V is not available with types-C,D.(Types-C,D are equipped.) and 2000A.
  \*\*6 In the case of code V and class PM, insulation cover is necessary for the terminals and conductors.

## Example for Order No.

20VPR25D1ID12110B0000 (without optional accessories)

20VPR25D1ID12110B000APE (With Draw-out mechanism padlock device and Earthing switch with electrical interlock)

	Standard	Table 50	20-VPR-D	Fixed (	type-L)									
	1 2	3(4)(5)	6 7	8	9	10	11)	12 (13)	14)	15)	16	17	18	19
	2 0	<b>VPR</b>		П	_		1				0	Λ		
	7	VPN	لبالبا	שו	-	Щ	<b>-</b>	لبالبا	IЩ	Щ	Ų	A	Щ	Щ
SU			Rated	<u> </u>	<u> </u>		- 1		Closing	<u> </u>	<u> </u>			Closing
Specifications	Rated voltage	Туре	short-circuit Breaking current	Series name	Classification	Standards	Mounting configuration	Rated current	operation /control voltage	Tripping control voltage	Position switch	Secondary connector	Auxiliary switch	spring charge indication switch
	2 0 24kV	VPR	16kA	D	Standard	JEC 2300(1998)	Fixed (type-L)	06 600A/630A	100~125 VAC/VDC	100~125 VDC	O ×	CodeA (Without interlock)	Standard (5a5b)	×
S			2 5 25kA			IEC 60056		12 1200A/1250A	200/220 VAC/VDC	2 200/220 VDC			For microurrent / Standard 3a3b contact For microcurrent 2a2b contact	With 1C
Codes and descriptions									7 24VDC	7 24VDC				
Sodes and									<b>8</b> 48VDC	8 48VDC				
0										100/110 VAC with CTD				
										200/220 VAC with CTD				

